




imarble

INCREDIBLY ITALIAN

DEMOR
HOME WORLD



SMALL MEDIUM LARGE

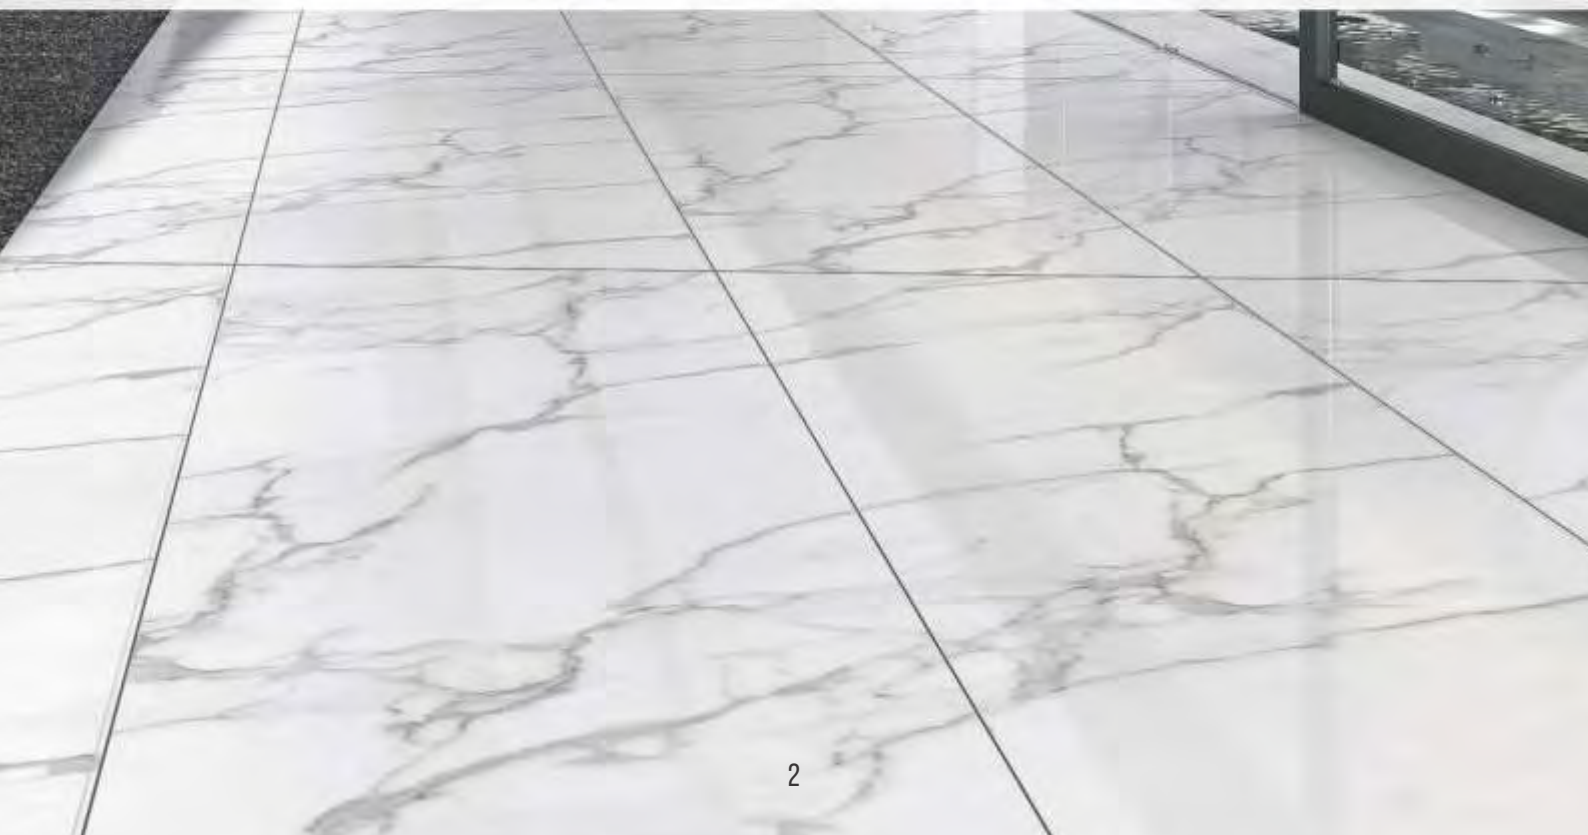



SUNLIGHT RESISTANT

The Sun's harmful UV Rays do not affect the vibrant appearance of the iMarble slabs. There is no withering on the surface.

STAIN RESISTANT

Highly compact and non-porous surface of iMarble resists the penetration of stains beneath the surface layer, making it resistant to stains and relatively easy to clean.

CHEMICAL RESISTANT

The iMarble slab is highly non-reactive to solvents, disinfectants, detergents, cleaning agents (bleach, ammonia), diluted acid and alkali solutions and swimming pool salts.

SLIM TILES

iMarble slabs are 33% less thick compared to its peers. The sleekness makes these tiles ideal for wall paneling, wall décors, wall claddings and table tops.

BENDING STRENGTH

iMarble slabs have a very high bending strength or breaking strength as tested by a three-point loading test.

HIGH FLEXIBILITY

The high tensile strength of iMarble slabs makes it easier to shape for any kind of surface.

UNPARALLEL AESTHETIC BEAUTY

Every iMarble slab design has been manufactured in high definition to accentuate its allure and overall aesthetics.

ENERGY EFFICIENT

It is ensured that the manufacturing process that these iMarble slabs go through is extremely energy efficient.

ABRASION RESISTANT

All our non-polished iMarble slabs are manufactured with materials that are resistant to surface abrasions and scratches.

LARGE FORMAT

The large format of iMarble slabs easily covers large spaces with ultra-minimal visible joints, giving an unobstructed view of the design or the graphic, thus providing a seamless look.



IDEAL FOR RENOVATION

The high durability and attractive aesthetics of iMarble slabs are perfect for renovating buildings. The iMarble tiles also support the structure internally, making it stronger and boosting its life span.

RESISTANCE TO THERMAL SHOCK

iMarble slabs are manufactured with materials that are resistant to frequent sudden changes in temperature.

PRE-POLISHED

Polishing natural marble is a hard task since one has to find a mason to buff the surface of the marble. However, iMarble slab's processed body is highly polished and retains it for years.

ZERO POROSITY

Another quality that iMarble slabs are imbued with is its low or zero porosity. When water settles on natural marble, it seeps in, making the marble weak, inviting fungal, algae, moles growth, etc. With iMarble slabs, all these problems can be avoided.




Full Body Vitrified Tiles - 14mm

Standards according to ISO 13006 / EN 14411 / IS 15622-2017 (Group B1a): Dry - Pressed Ceramic Tiles (Glazed Vitrified Tiles)

CHARACTERISTIC	TEST METHOD	REQUIREMENTS	Standard
Dimensions & Surface Quality			
Deviation in length & Width	ISO-10545-2	± 0.10%	Within Criteria
Deviation in Thickness	ISO-10545-2	± 5.00%	Within Criteria
Straightness of Sides	ISO-10545-2	± 0.10%	Within Criteria
Rectangularity	ISO-10545-2	± 0.10%	Within Criteria
Surface Flatness	ISO-10545-2	± 0.50%	Within Criteria
Surface Quality	ISO-10545-2	Min. 95% of the Tiles shall be free from visible defects that would impair the appearance of a major area of the Tiles	Within Criteria
Physical Properties			
Water Absorbption	ISO 10545-03	Average ≤ 0.08%, Individual 0.10% Max.	Within Criteria
Modulus of Rapture	ISO 10545-04	R ≥ 35 N/mm ²	Compliant
Breaking Strength	ISO 10545-04	Min. 1300 N	2500 N
Moisture Expansion	IS 13630-3	0.02 Max	Compliant
Moh's Hardness	EN 101	Min. 5	Compliant
Surface Abration Resistance	ISO 10545-07	Class II Min.	Compliant
Linear Thermal Expansion	ISO 10545-08	Max. 6.0 × 10 ⁻⁶	Compliant
Thermal Shock Resistance	ISO 10545-09	Min. 10 Cycles	Compliant
Crazing Resistance	ISO 10545-11	4 Cycles at 7.5 Bar Min.	Compliant
Impact Resistance	ISO 10545-05	0.55 Min.	Compliant
Frost Resistance	ISO 10545-12	Required	Compliant
Resistance to Deep Abration (Unglazed Tiles)	ISO 10545-6	175 Max.	Compliant
Bulk Density	IS 13630-2	2.20 g/cc	Compliant
Chemical Properties			
Resistance to High & Low Concentrations of Acids & Alkalis	ISO 10545-13	As per Mfg.	No visible effect
Resistance to household chemicals & swimming pool Salts	ISO 10545-13	Min. GB	Compliant
Stain Resistance	ISO 10545-14	Min. Class 3	Compliant

Packing Details :

Brand	Dimension (mm)	Box		
		Tile / Box (Nos.)	Coverage / Box (Sq.ft.)	Coverage / Box (Sq.mtrs.)
DGVТ	600x1200mm	2	15.50	1.44
	195x1200mm	6	15.06	1.40
	800x800mm	3	20.67	1.92
	600x600mm	4	15.50	1.44
Qrock	600x1200mm - Full Body	2	15.50	1.44
	600x600mm - Full Body	4	15.50	1.44
	600x600mm - 14MM	3	11.62	1.08
ROBUSTONE	600x600mm	4	15.50	1.44
WALL TILES	300x900mm	4	11.62	1.08
	300x600mm	8	15.50	1.44
	300x450mm	5	7.27	0.67
	300x300mm	8	7.75	0.72

Disclaimer: Colors shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information give. However, the company reserves the right to change the specifications without any notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

FEATURES



Installation Friendly

What makes the iMarble intelligent are the grand sizes it is available in. This makes installation a very simple task. For example, one single slab of 1200x 2400mm will replace 8 tiles of standard 600x 600mm size.

Pre-Polished

Polishing natural marble is a hard task since one has to find a mason to buff the surface of the marble. However, iMarble's processed body is highly polished and retains it for years.



Light Weight

The iMarble weighs at least 60% less than traditional and current Italian marble. This adds to the simplicity of installation and transport of the slabs.

Resin-Free

Resin is a synthetic polymer used as an adhesive for treating cracks in natural marble. iMarble uses no resin treatment as there are no cracks in it. Since resin has an adverse effect on the skin, iMarble is a far more better and healthier option than natural marble.



Compact Body/ High MOR

Natural marble has a very low modulus of rupture (MOR), while processed slabs of iMarble are compact made and have a very high breakage strength, making iMarble a far more stronger choice than traditional marble.

Zero Maintenance

Even when used in high-traffic areas, iMarble needs minimum care because of its low porosity, highly compact body and high hardness index.



Facades

Apart from just flooring, iMarble can be used in many other applications like, facades, lifts, ventilated and non-ventilated facades. iMarble can be installed easily by means of wet/dry cladding.

Zero Porosity Ensuring Anti-Fungal Life

Another quality that iMarble is imbued with is its low or zero porosity. When water settles on natural marble, it seeps in, making the marble weak, inviting fungal, algae growth, etc. With iMarble, all these problems can be avoided.



**ENVIRONMENT FRIENDLY**

The manufacturing of iMarble slabs is completed through environment-friendly processes, which only uses materials that do not harm the nature in any manner.

PROVIDES ACOUSTIC INSULATION

iMarble slabs inherently provide a level of acoustic insulation from noises in your vicinity.

RESIN FREE

Resin is a synthetic polymer used as an adhesive for treating cracks in natural marble. iMarble slabs uses no resin treatment as there are no cracks in it. Since resin has an adverse effect on the skin, iMarble slabs are far better and healthier option than natural marble.

INCREASES A BUILDING'S LIFESPAN

iMarble slabs can withstand harsh conditions, which gives added protection and support to the structure, increasing its lifespan.

**IDEAL FOR FACADES**

Apart from just flooring, iMarble slabs can be used in many other applications like facades, lifts, ventilated and non-ventilated facades. iMarble can be easily installed by means of wet/dry cladding.

HYGIENIC MATERIAL

iMarble slabs are made with non-harmful and non-toxic substances, which make it suitable for all kinds of ambiances, and absolutely safe for human touch and contact with food.

EMPOWERS SUSTAINABILITY

The production process of iMarble slabs is designed to minimize carbon footprint and promote sustainability. iMarble slabs are biodegradable and recyclable, hence it promotes 'Green Globe' initiative.

FIRE & FROST RESISTANT

iMarble slabs are non-combustible when exposed to fire or extreme heat. iMarble slabs do not emit toxic gases while on fire, making it safe for indoor use in residential and commercial buildings. On the other hand, the tiles are also resistant to extreme freezing temperatures.

ZERO MAINTENANCE

Even when used in high-traffic areas, iMarble slabs need minimum care because of its low-porosity, highly compact body and high hardness index, making iMarble slabs the ideal replacement for natural marble.





1200x2400mm



800x2400mm



800x1600mm



1200x1200mm



195x1200mm



195x1600mm



HOME



SHOPPING MALLS



AIRPORT TERMINALS



CORRIDORS HALLS



CAFÉ, PUBS & BARS



OFFICES

TECHNICAL FEATURES



STAIN
RESISTANT



SCRATCH
RESISTANT



HIGH ABRASION
RESISTANT



ZERO
MAINTENANCE




ALMOST 0% WATER
ABSORPTION



THERMAL
RESISTANT



11 MM
THICKNESS



HIGH FLEXURAL
STRENGTH



FOR WALL
& FLOOR



EASY
INSTALLATION



EASY TO
CLEAN



FIRE
RESISTANT



CHEMICAL
RESISTANT



THEATERS HALLS



HOSPITALS



SCHOOLS



INDUSTRIES



SUPER MARKETS



BANKS

APPLICATION AREAS



HOME



THEATRES HALLS



OFFICES



SUPER MARKETS



HOSPITALS



RELIGIOUS PLACES



SCHOOLS



RESTAURANT



INDUSTRIES



SHOPPING MALLS



CORRIDORS HALLS




BANK




CAFÉ, PUBS & BARS



AIRPORT TERMINALS



Creating Great Indoors Is
All About Creating Beauty
That Nourishes
The Soul

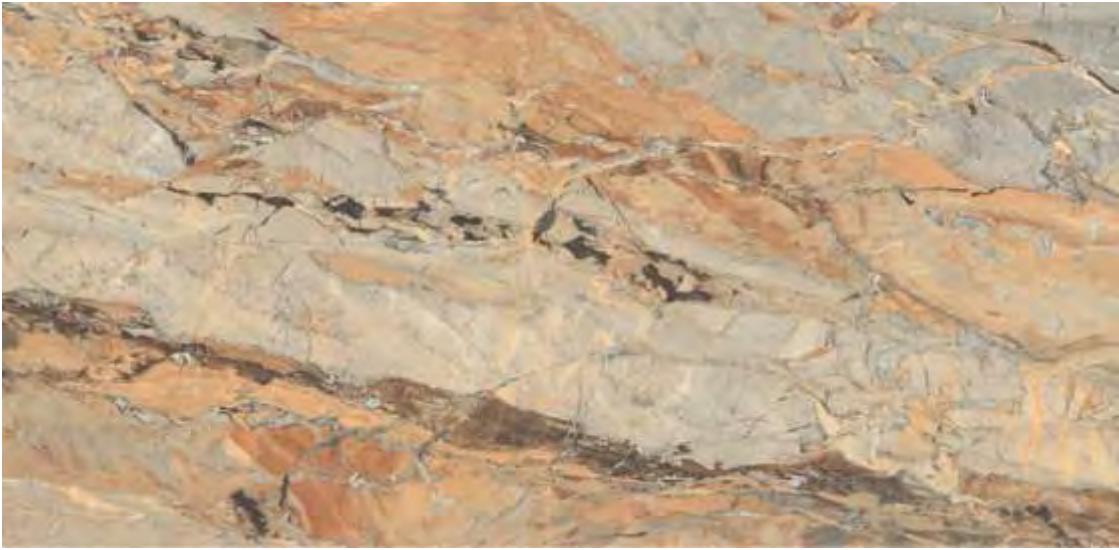

Sarron Colin Fantastico

Polished



Rosso Crema

Polished



French Grey

Polished




French Steel | 1200x2400mm



French Steel

Polished

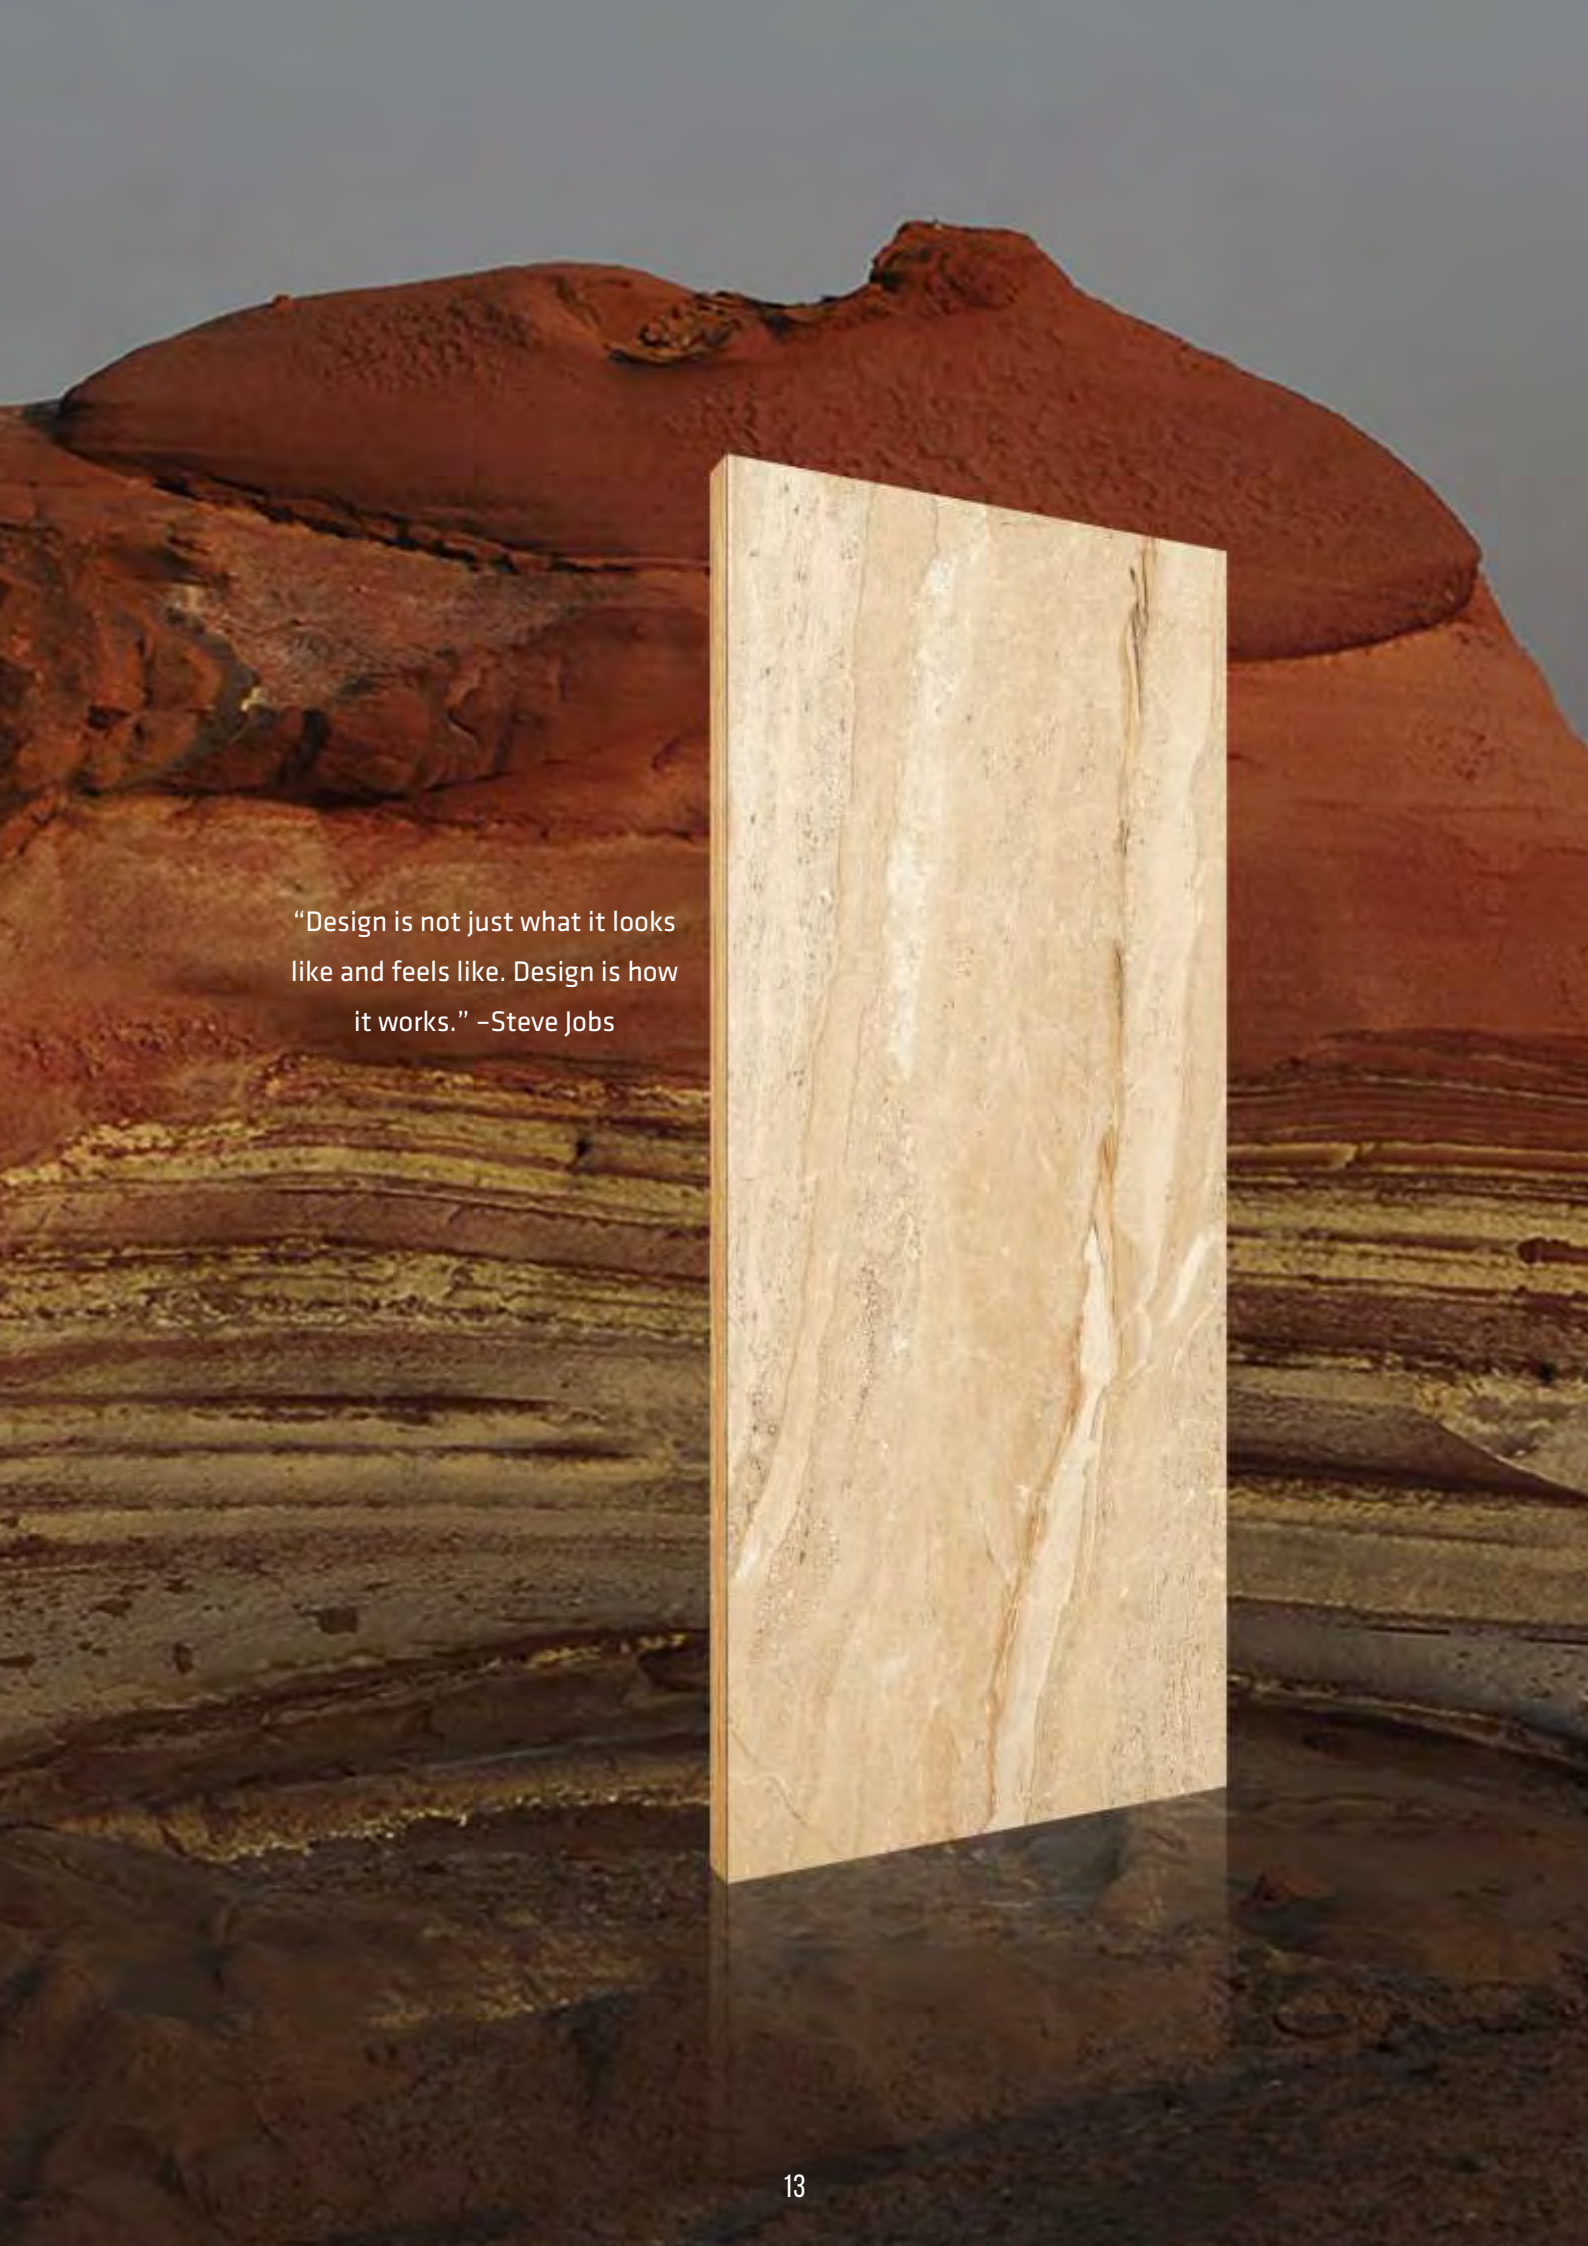

“Design is not just what it looks like and feels like. Design is how it works.” –Steve Jobs



Black Grenito

Polished



Black Grenito | 1200x2400mm



Dyna Fantastico | 1200x2400mm



Dyna Fantastico

Polished



Marmi Bianco

Polished



Sahara Nero

Polished



Breccia Aurora

Polished




Travertino Classico

Polished




Statuario Pearl

Polished

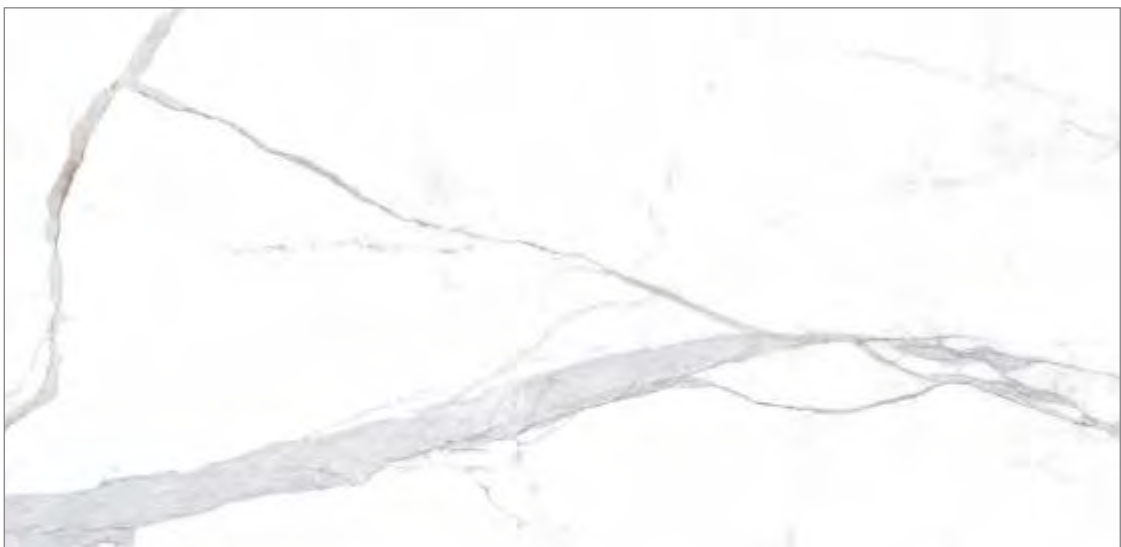

Statuario Super

Polished

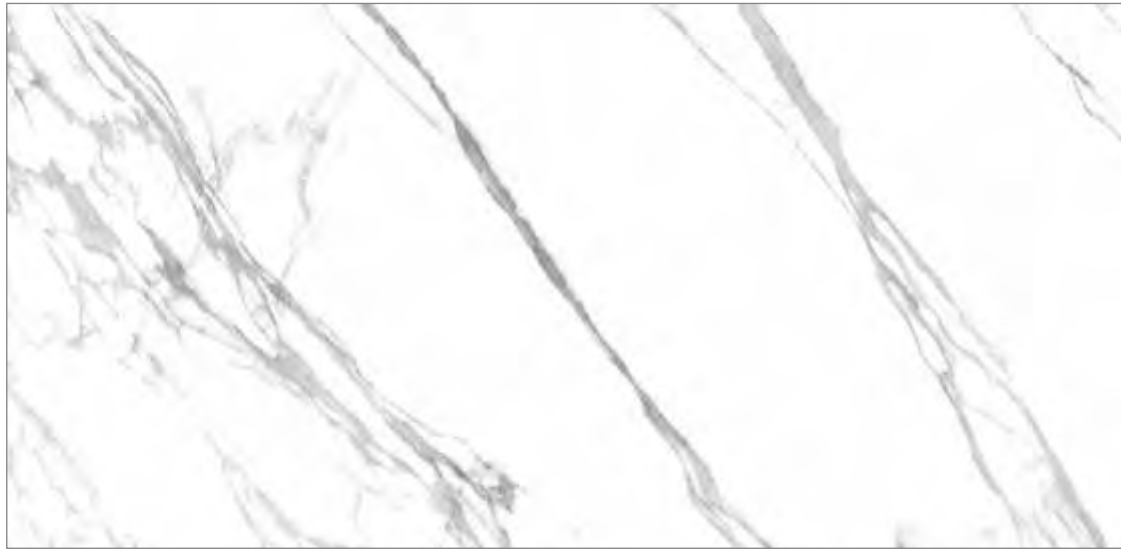

Statuario Classic

Polished





Azul Macauba

Polished



Armani Bronze

Pearl



Armani Gold

Polished




Armani Grey | 1200x2400mm



Armani Grey


Polished

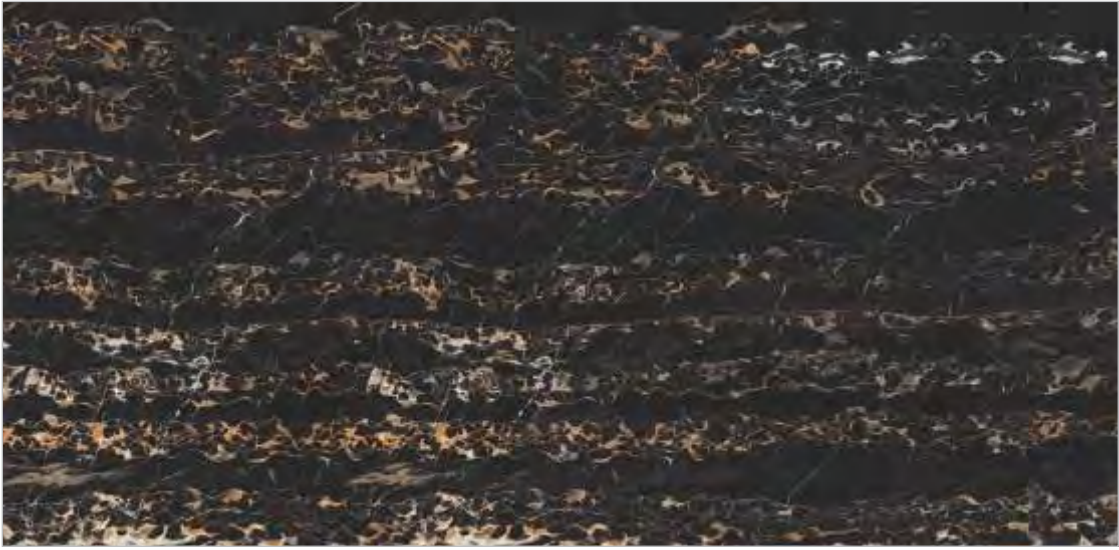

Portoro Gold

Polished






“To design is much more
than simply
to assemble,
to order..
it is to add value
and meaning,
to illuminate,
to simplify,
to clarify,
to modify,
to dignify,
to dramatize,
to persuade.
To design is
to transform prose into
poetry.” –Paul Rand




Portoro Silver

Polished

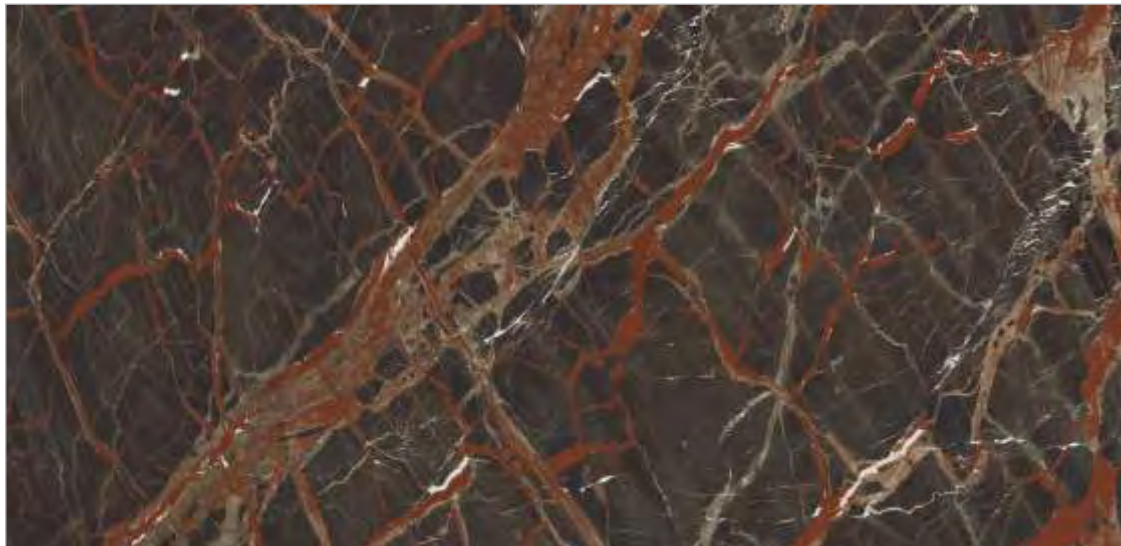

Estrada

Polished

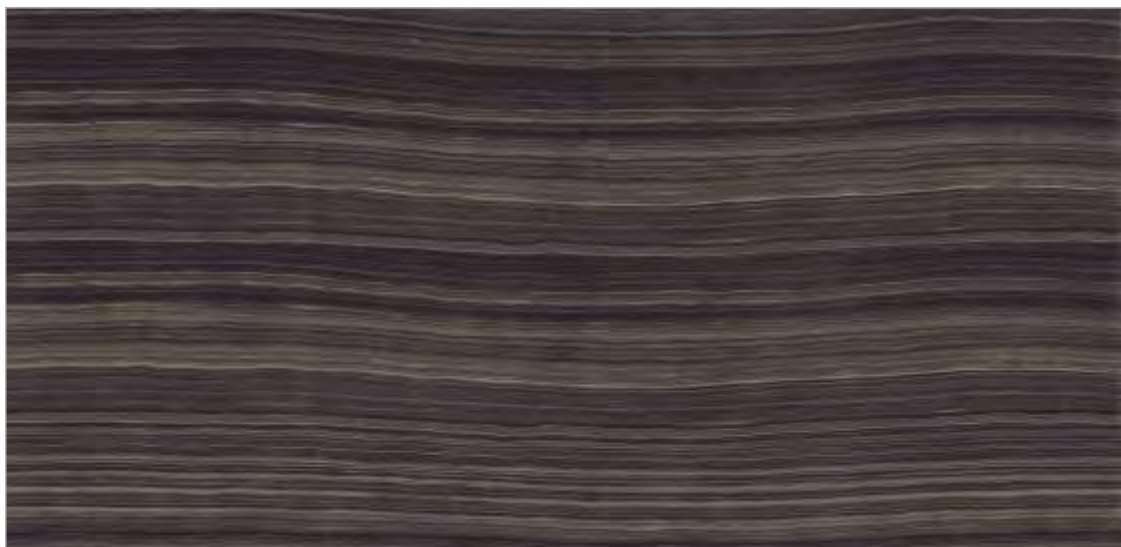

Tobacco Brown

Polished



Nivea Grigio

Pearl



Nivea Avorio

Pearl



Marfil

Polished



Lounge Ivory | 1200x2400mm



Lounge Ivory

Matt




Lounge Brown

Matt



THE MOST IMPORTANT WORK
YOU'LL EVER DO
WILL BE WITHIN THE WALLS
OF YOUR HOME

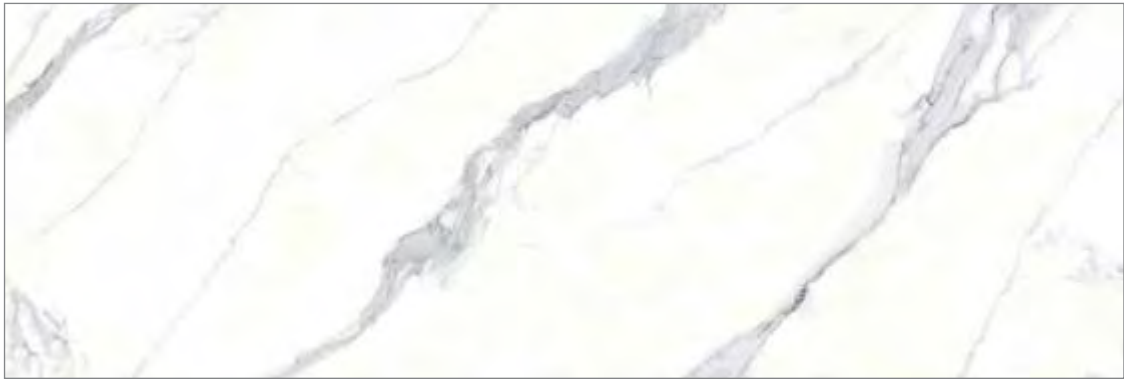


Mercury

Polished



Armani Grey

Polished

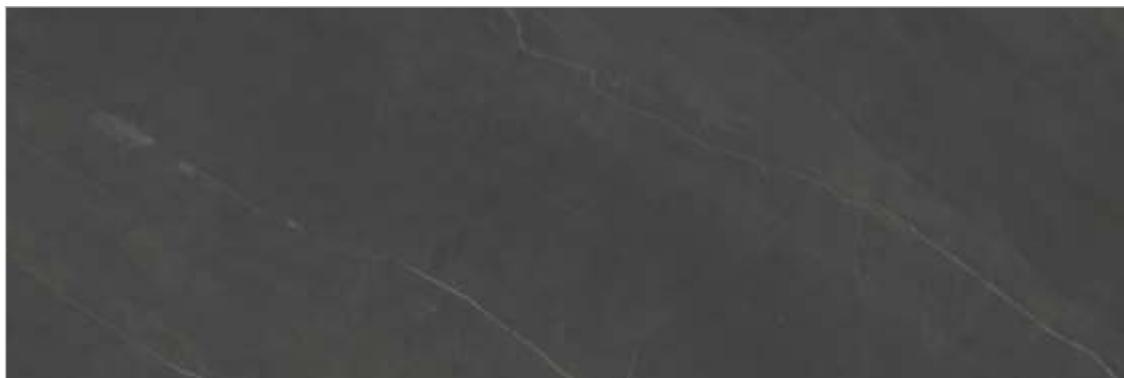


Armani Steel

Polished



Armani Gold

Polished

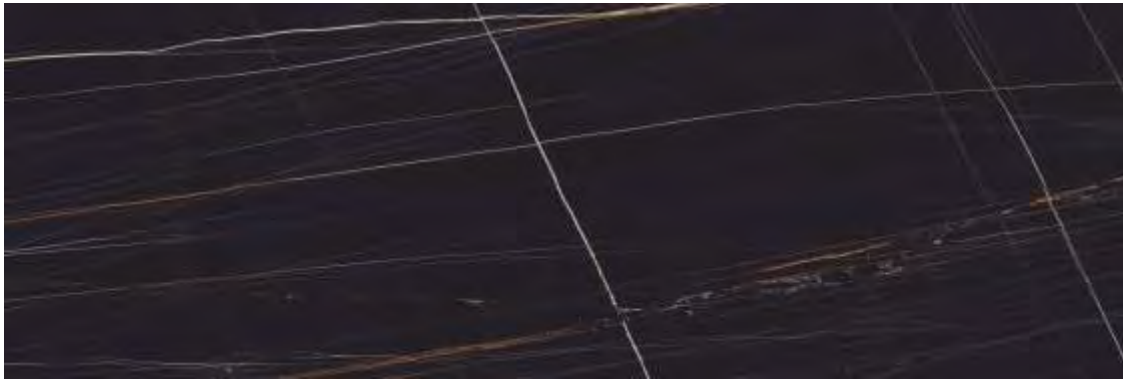

Black Beauty

Polished



Honey Onyx

Polished





Dyna

Polished



Marvel

Polished






Onyx Natural

Polished



Onyx Bianco

Polished

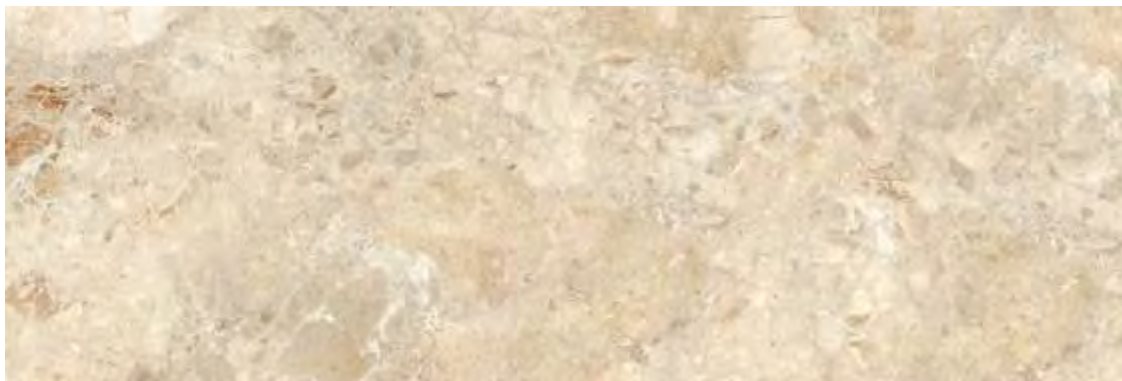

Breccia Aurora

Polished



Travel

Polished



Techno Beige

Polished






Techno Choco | 800x2400mm



Techno Choco

Polished

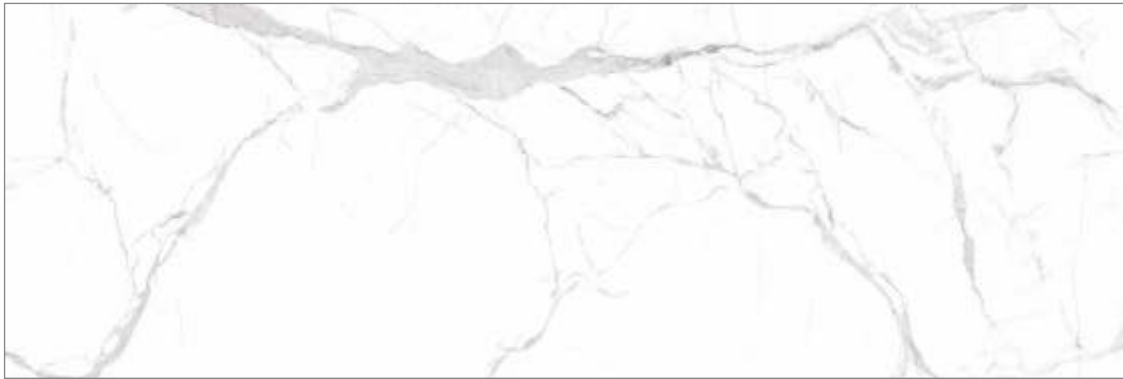

Statuario Fantastico

Polished



Statuario Ice

Polished




Titan Grey

Polished



Travertine Pearl


Pearl

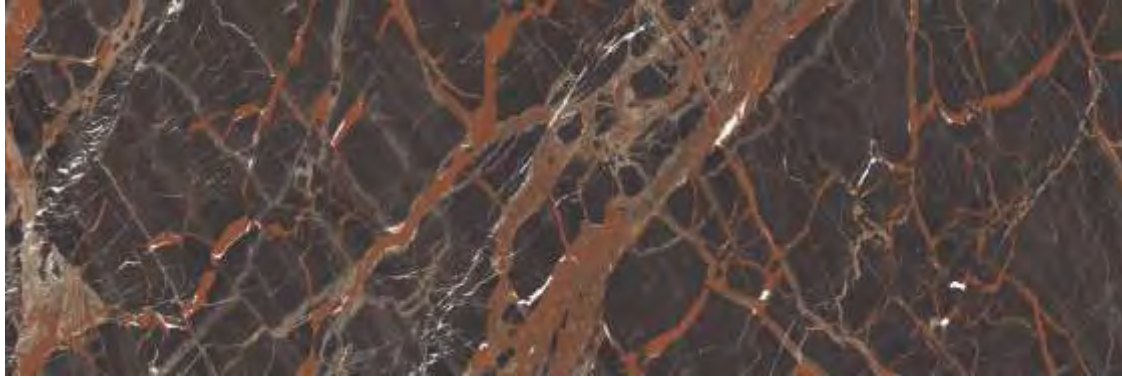

Estrada

Polished



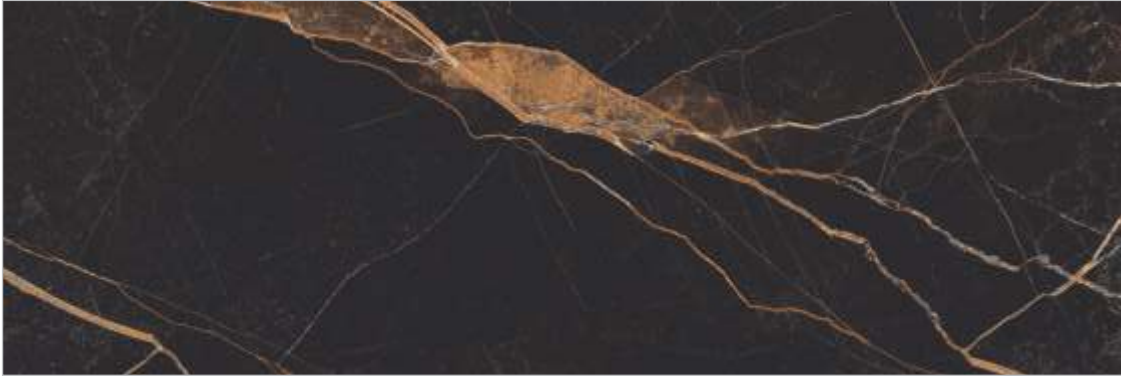

Sata Royal

Sugar



Smoke Steel Sugar


Sugar



Smoke Grey Sugar

Sugar



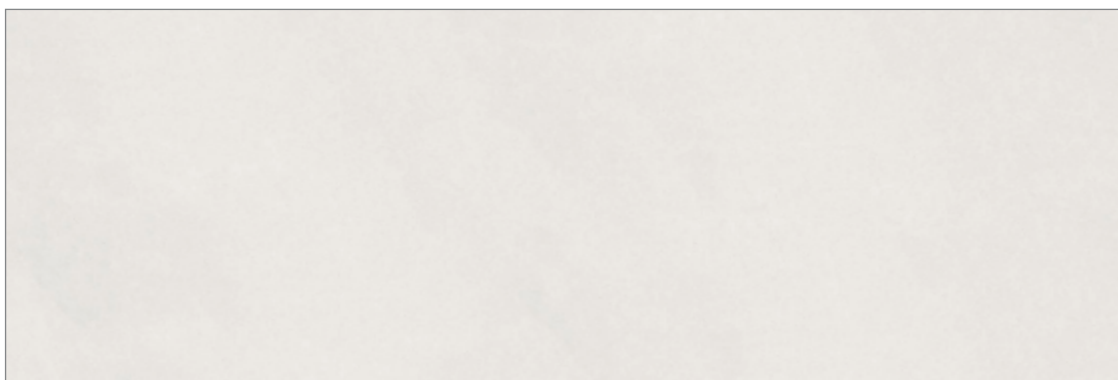


Orient Bianco

Matt




Orient Nero

Matt

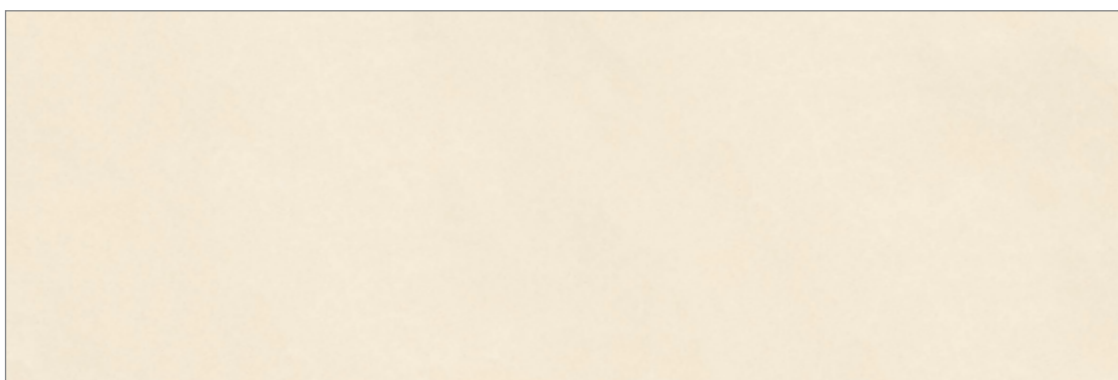

Orient Beige

Matt

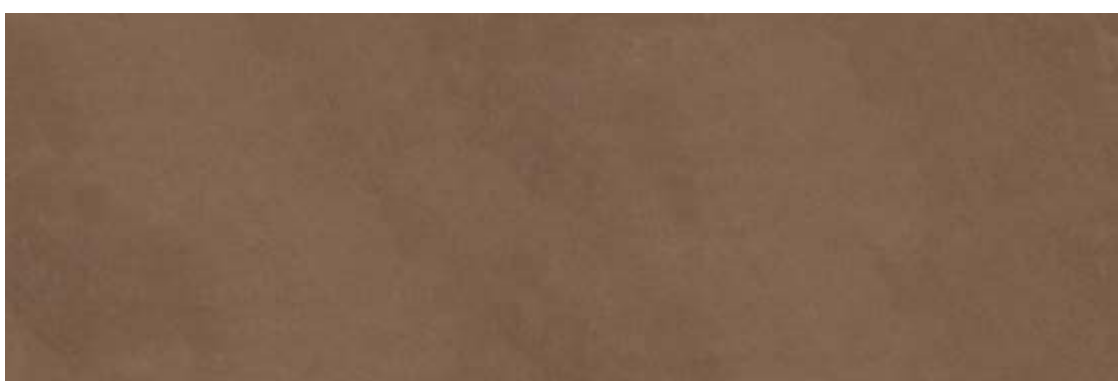

Orient Brown

Matt



Smoke Steel Rust | 800x2400mm



Smoke Grey Rust

Matt



Smoke Steel Rust

Matt



Orient Smoke

Matt



Orient Grey Light

Matt



Orient Grey Light | 800x2400mm



Portland Grey

Matt



Portland Mocha

Matt



Portland Mocha | 800x2400mm



Quirky Cobalt

Matt





Walnut Natural | 800x2400mm



Bricola

Matt



Motely Wood

Matt




Walnut Natural

Matt




SOME PEOPLE LOOK FOR A BEAUTIFUL PLACE.
OTHERS MAKE THEIR PLACE BEAUTIFUL.

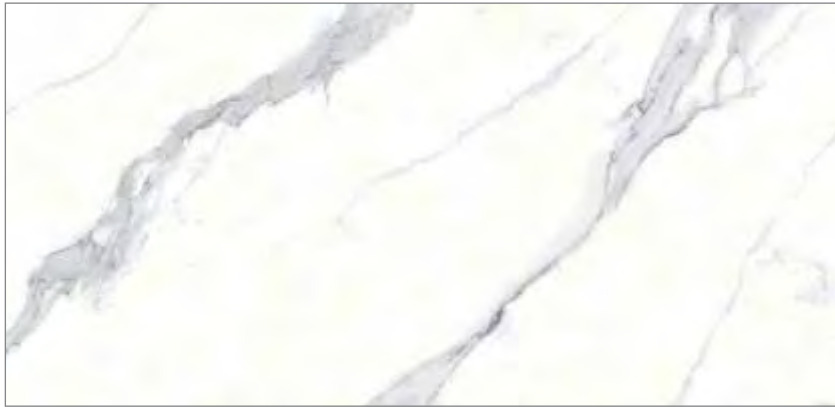


Mercury

Polished

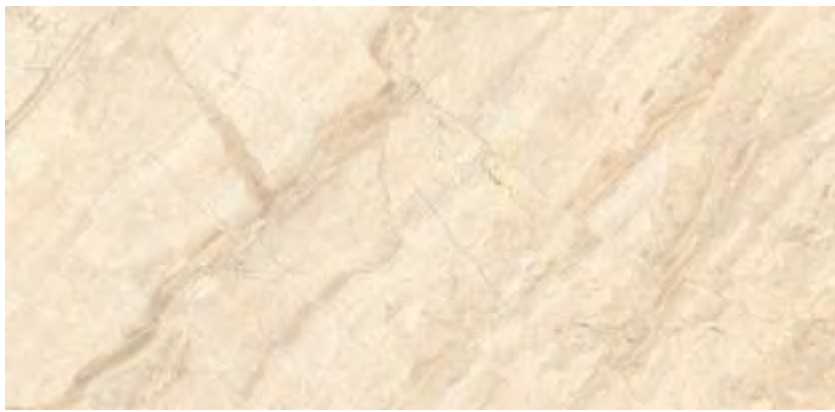

Dyna

Polished

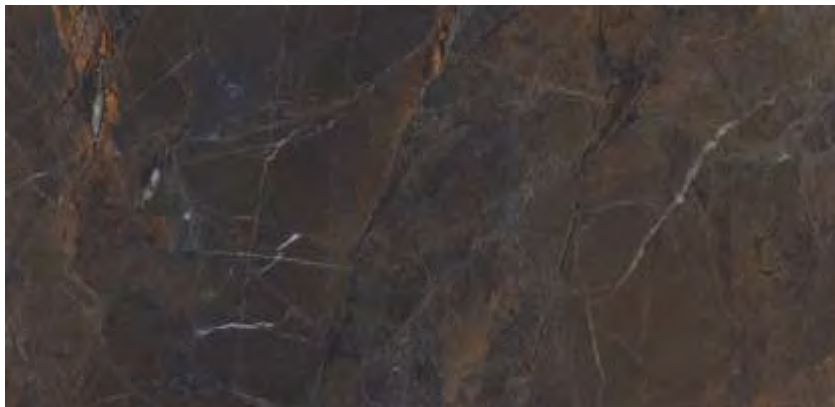

Rain Forest

Polished



Marvel

Polished



Titan Grey

Polished



Travel

Polished





Breccia Aurora

Polished



Bottichino Glossy

Polished





Travertino Classico

Polished



Dyna Fantastico

Polished




Statuario

Polished




Lilac

Polished

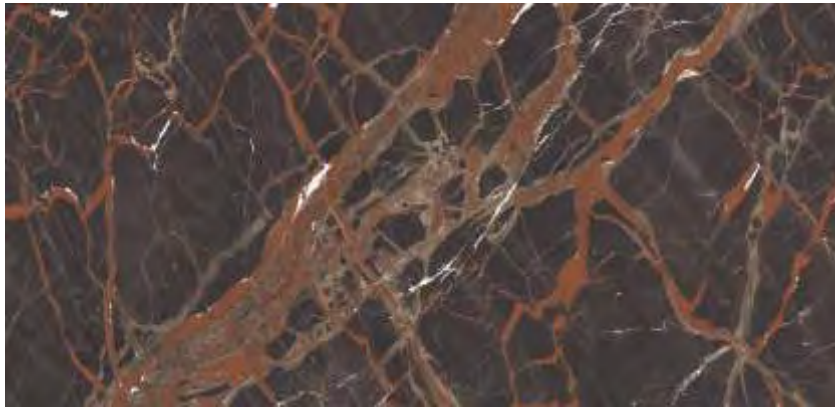

Estrada

Polished

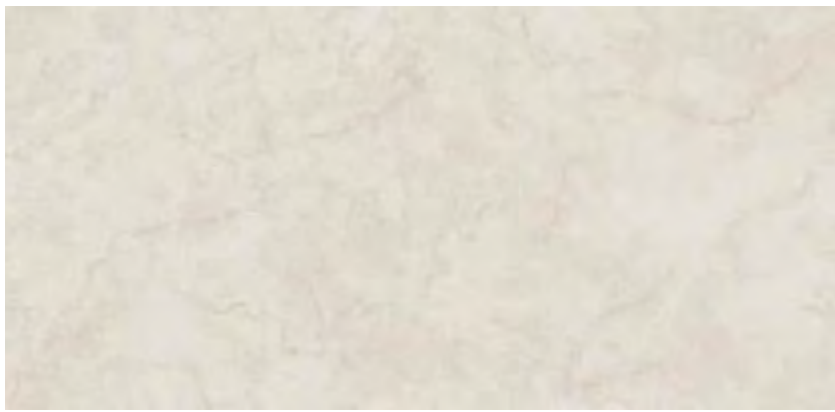

Marfil

Polished



Travertine Pearl

Pearl



Amazon Beige

Pearl



Esha Grey

Polished



Esha Crema

Polished





Classic Onyx

Polished



Onyx Natural

Polished



Onyx Bianco

Polished







Monty Grigio

Matt




Monty Slate

Matt




Smoke Grey Rust

Matt

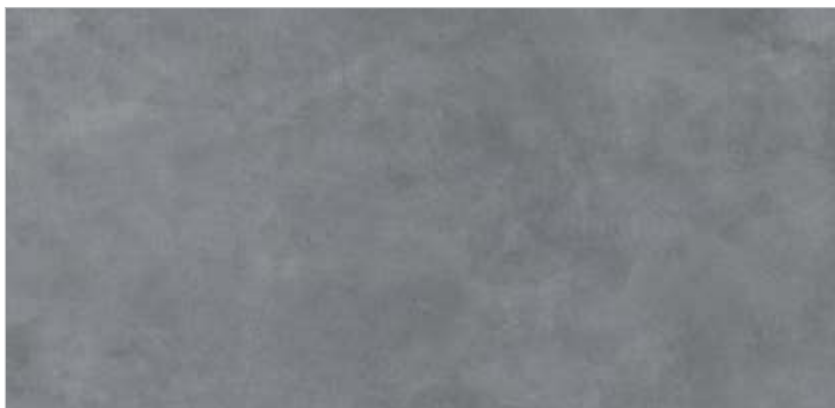

Smoke Steel Rust

Matt

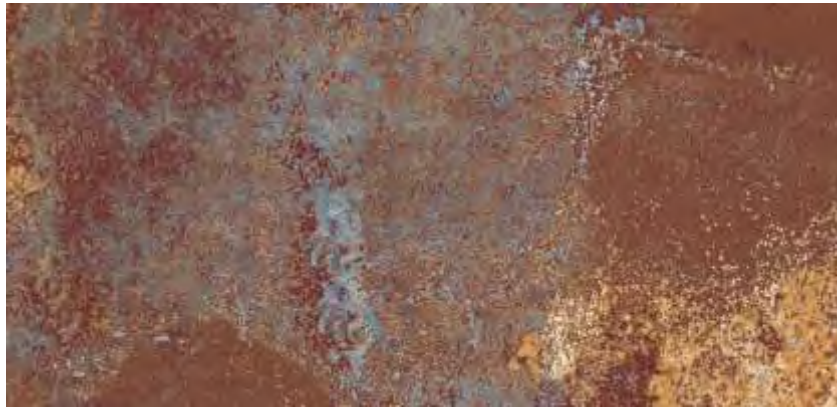

Oxido Red

Matt



Inco Metal


Matt



Acero Beige

Matt



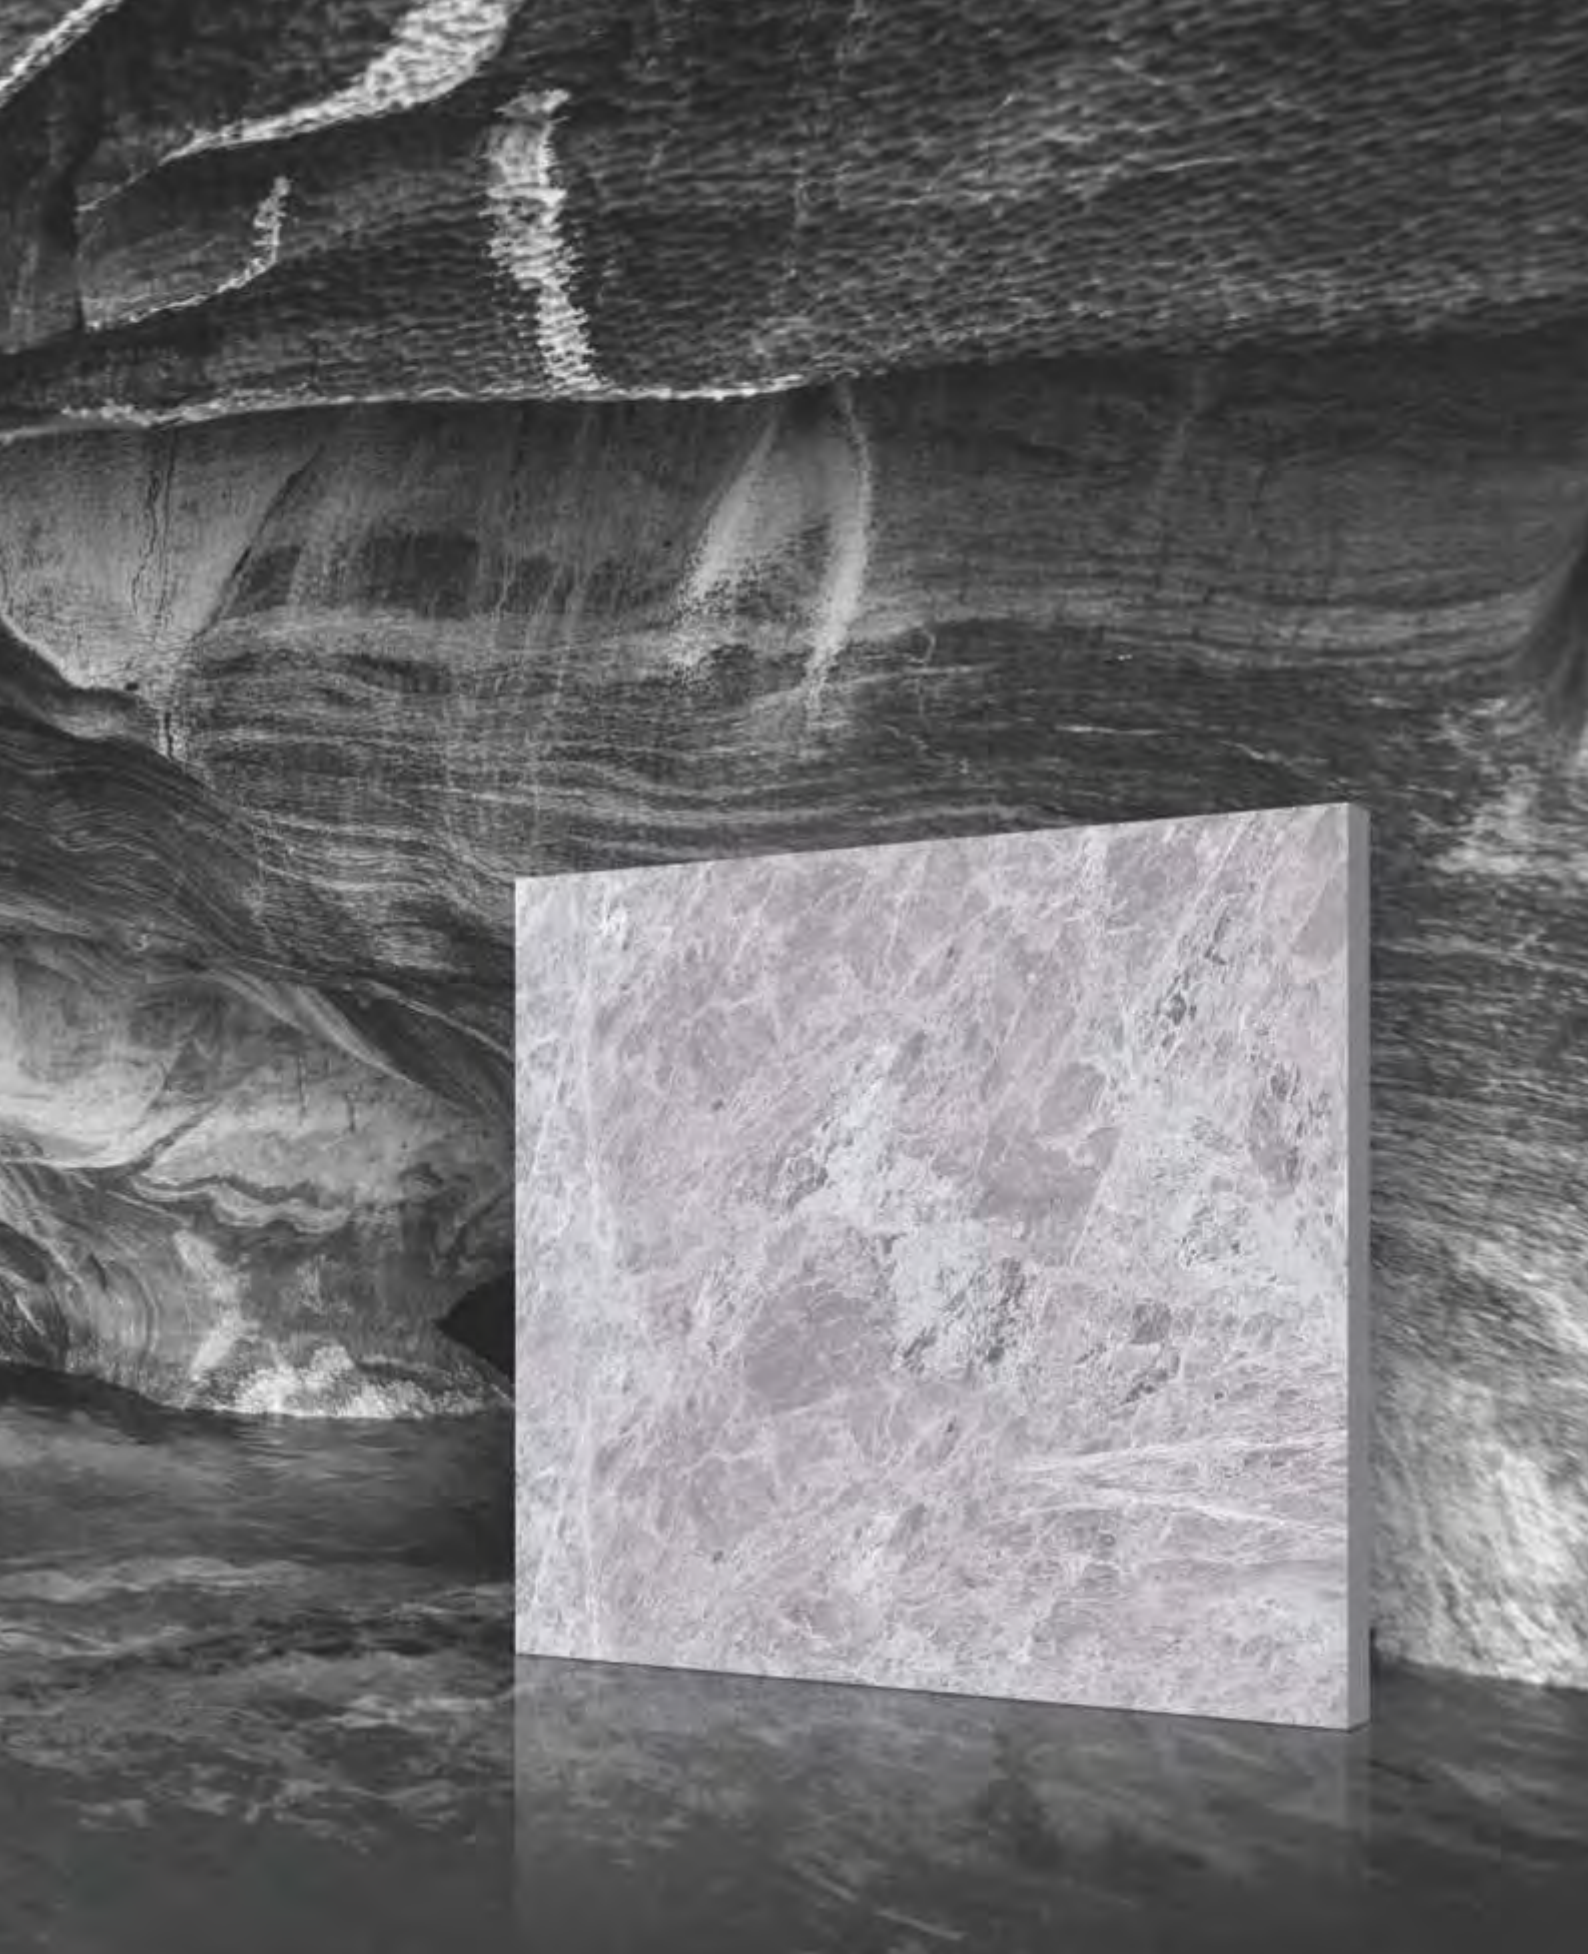


HOME IS NOT A PLACE. IT'S A STATE OF MIND.



Opera Brown

Polished

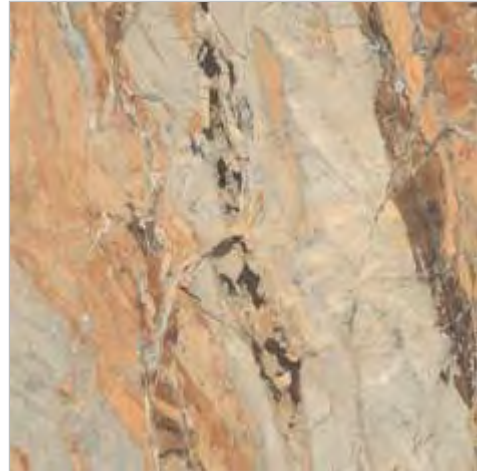

Sarron Colin Fantastico

Polished




French Gris

Polished




French Steel

Polished

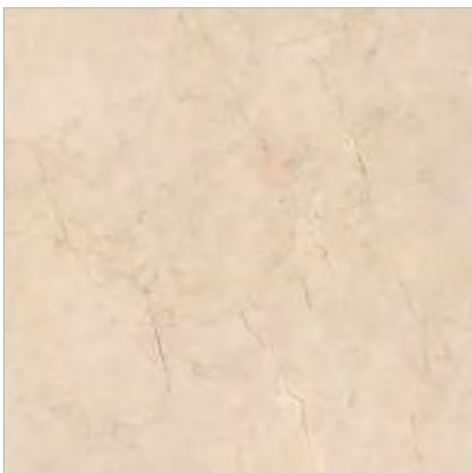

Marvel

Polished

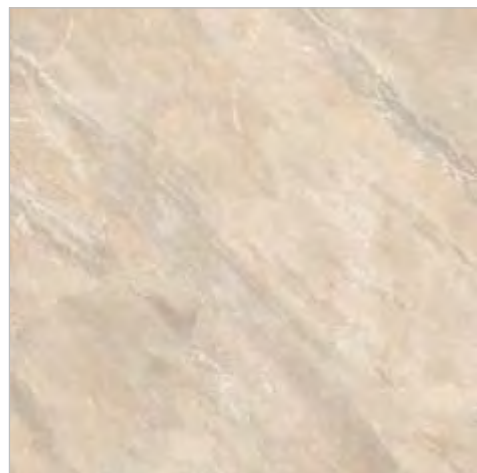


Italia Beige

Polished






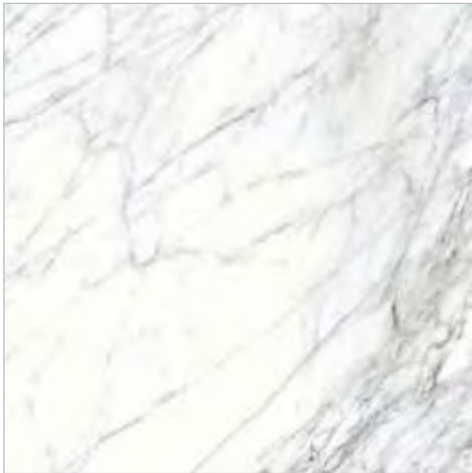

Opel Bianco

Polished

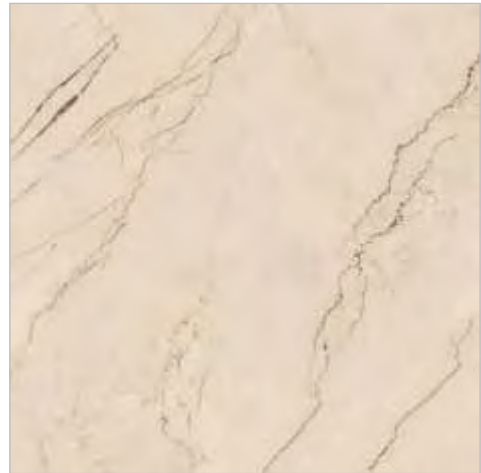


Rosso Crema

Polished



Esha Grey

Polished

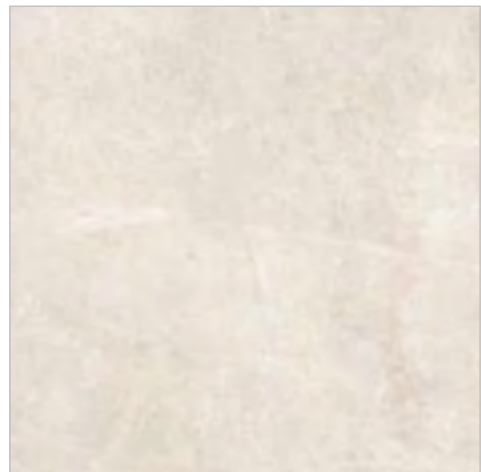

Esha Crema

Polished



Dyna Fantastico

Polished



Breccia Aurora

Polished




Marfil Polished




Emprador Light Polished



Statuario Classic Polished

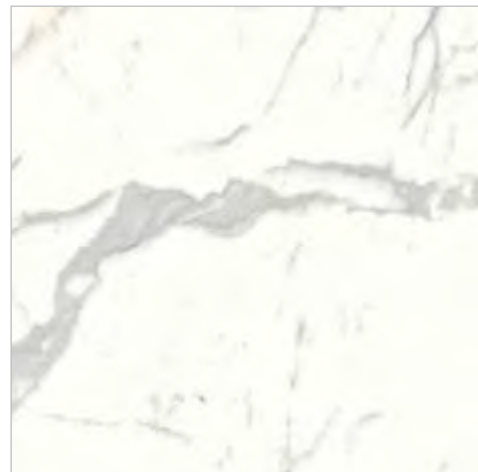

Statuario Gold Polished

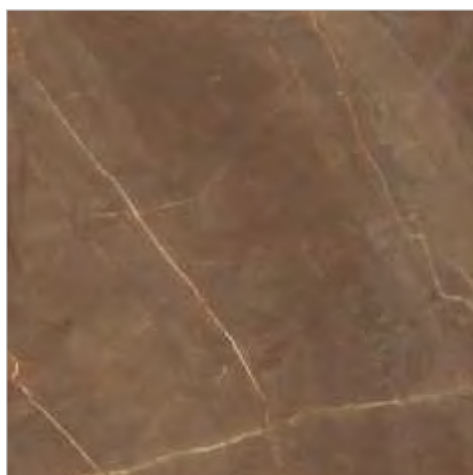


Armani Gold Polished



Titanium Black Polished





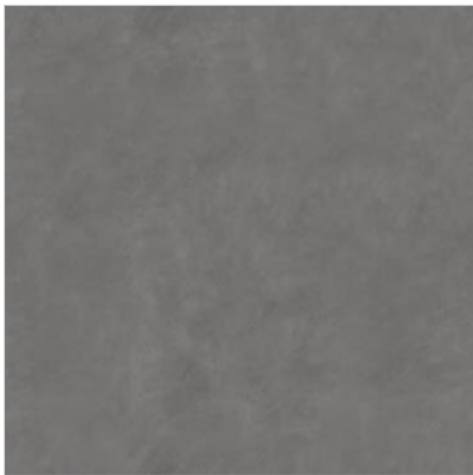

Plasto Gris Matt




Plasto Beige Matt



Plasto Brown Matt



Black Grenito Matt

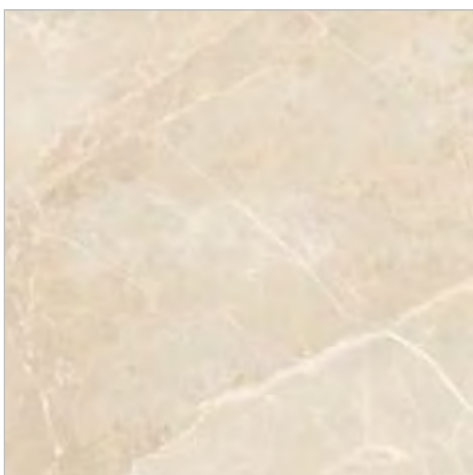

Nivea Avorio Pearl



Nivea Grigio Pearl



Pietra Bianco

Matt



Pietra Beige

Matt



Pietra Grey

Matt



Oxido Blue

Matt








Oxido Blue

Matt



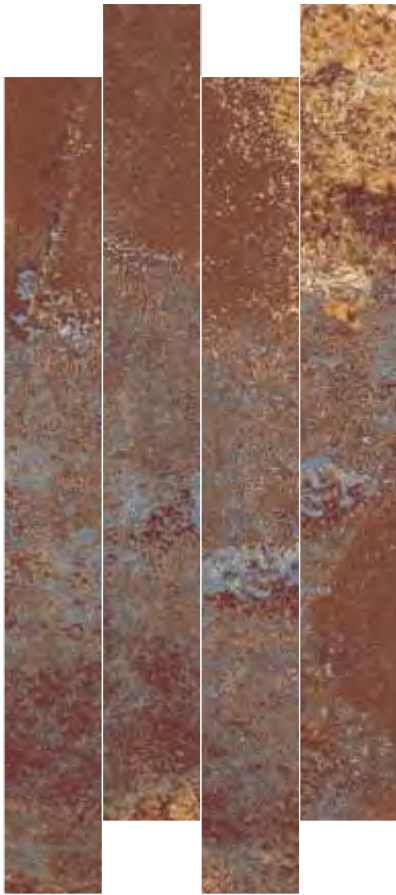


Oxido Red

Matt



Acero Beige


Matt Wood

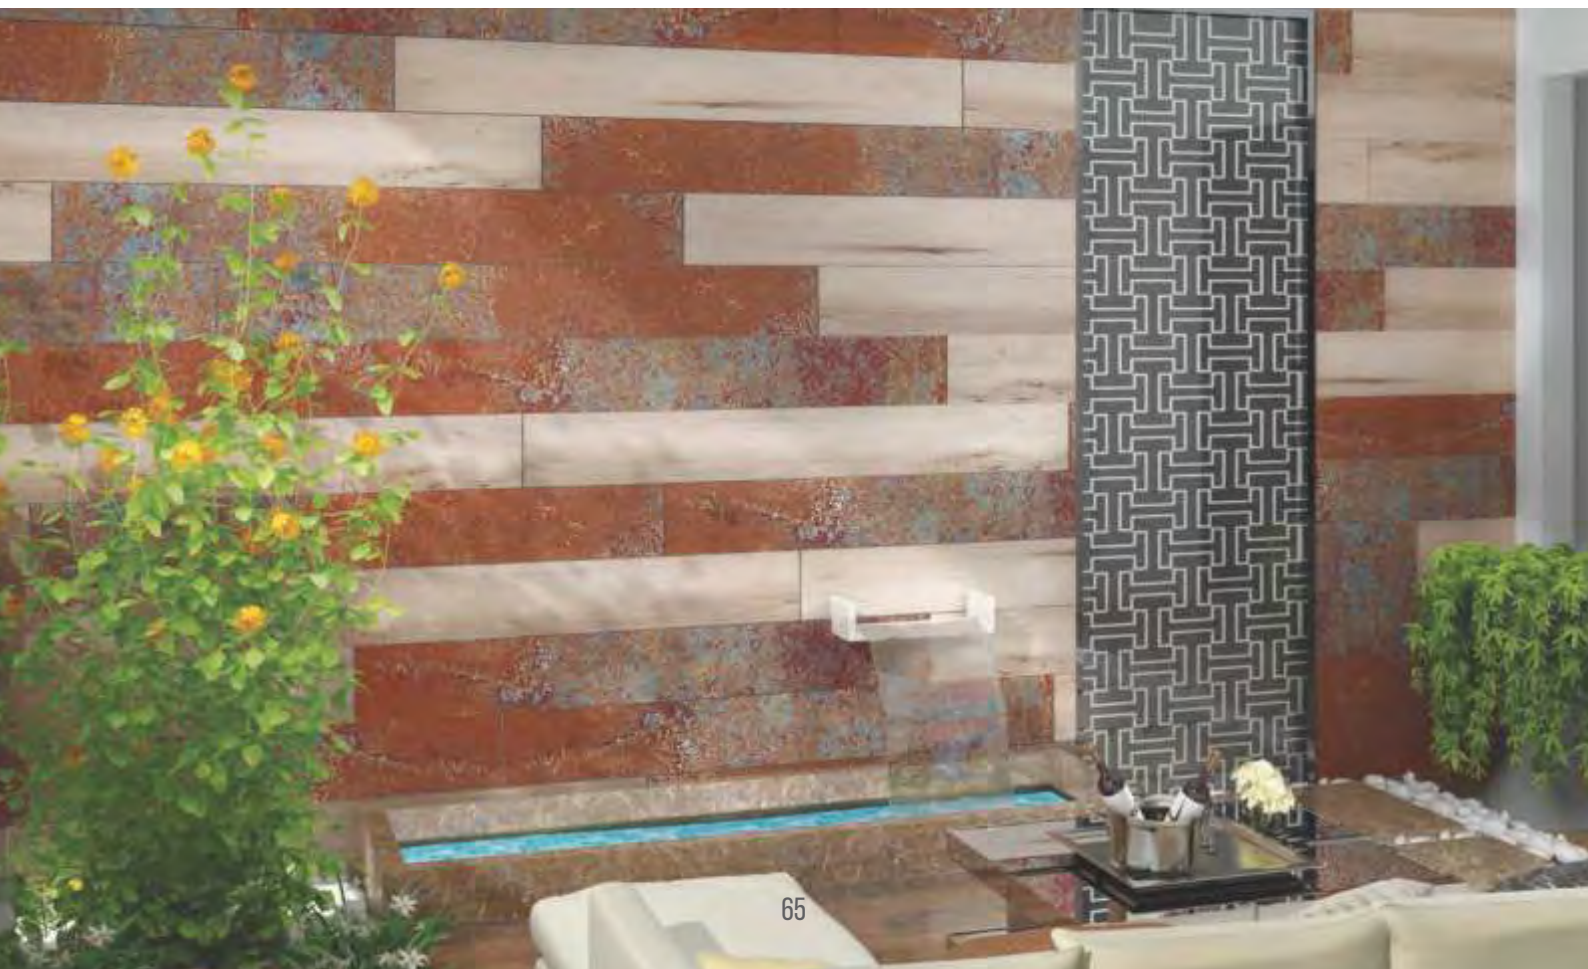









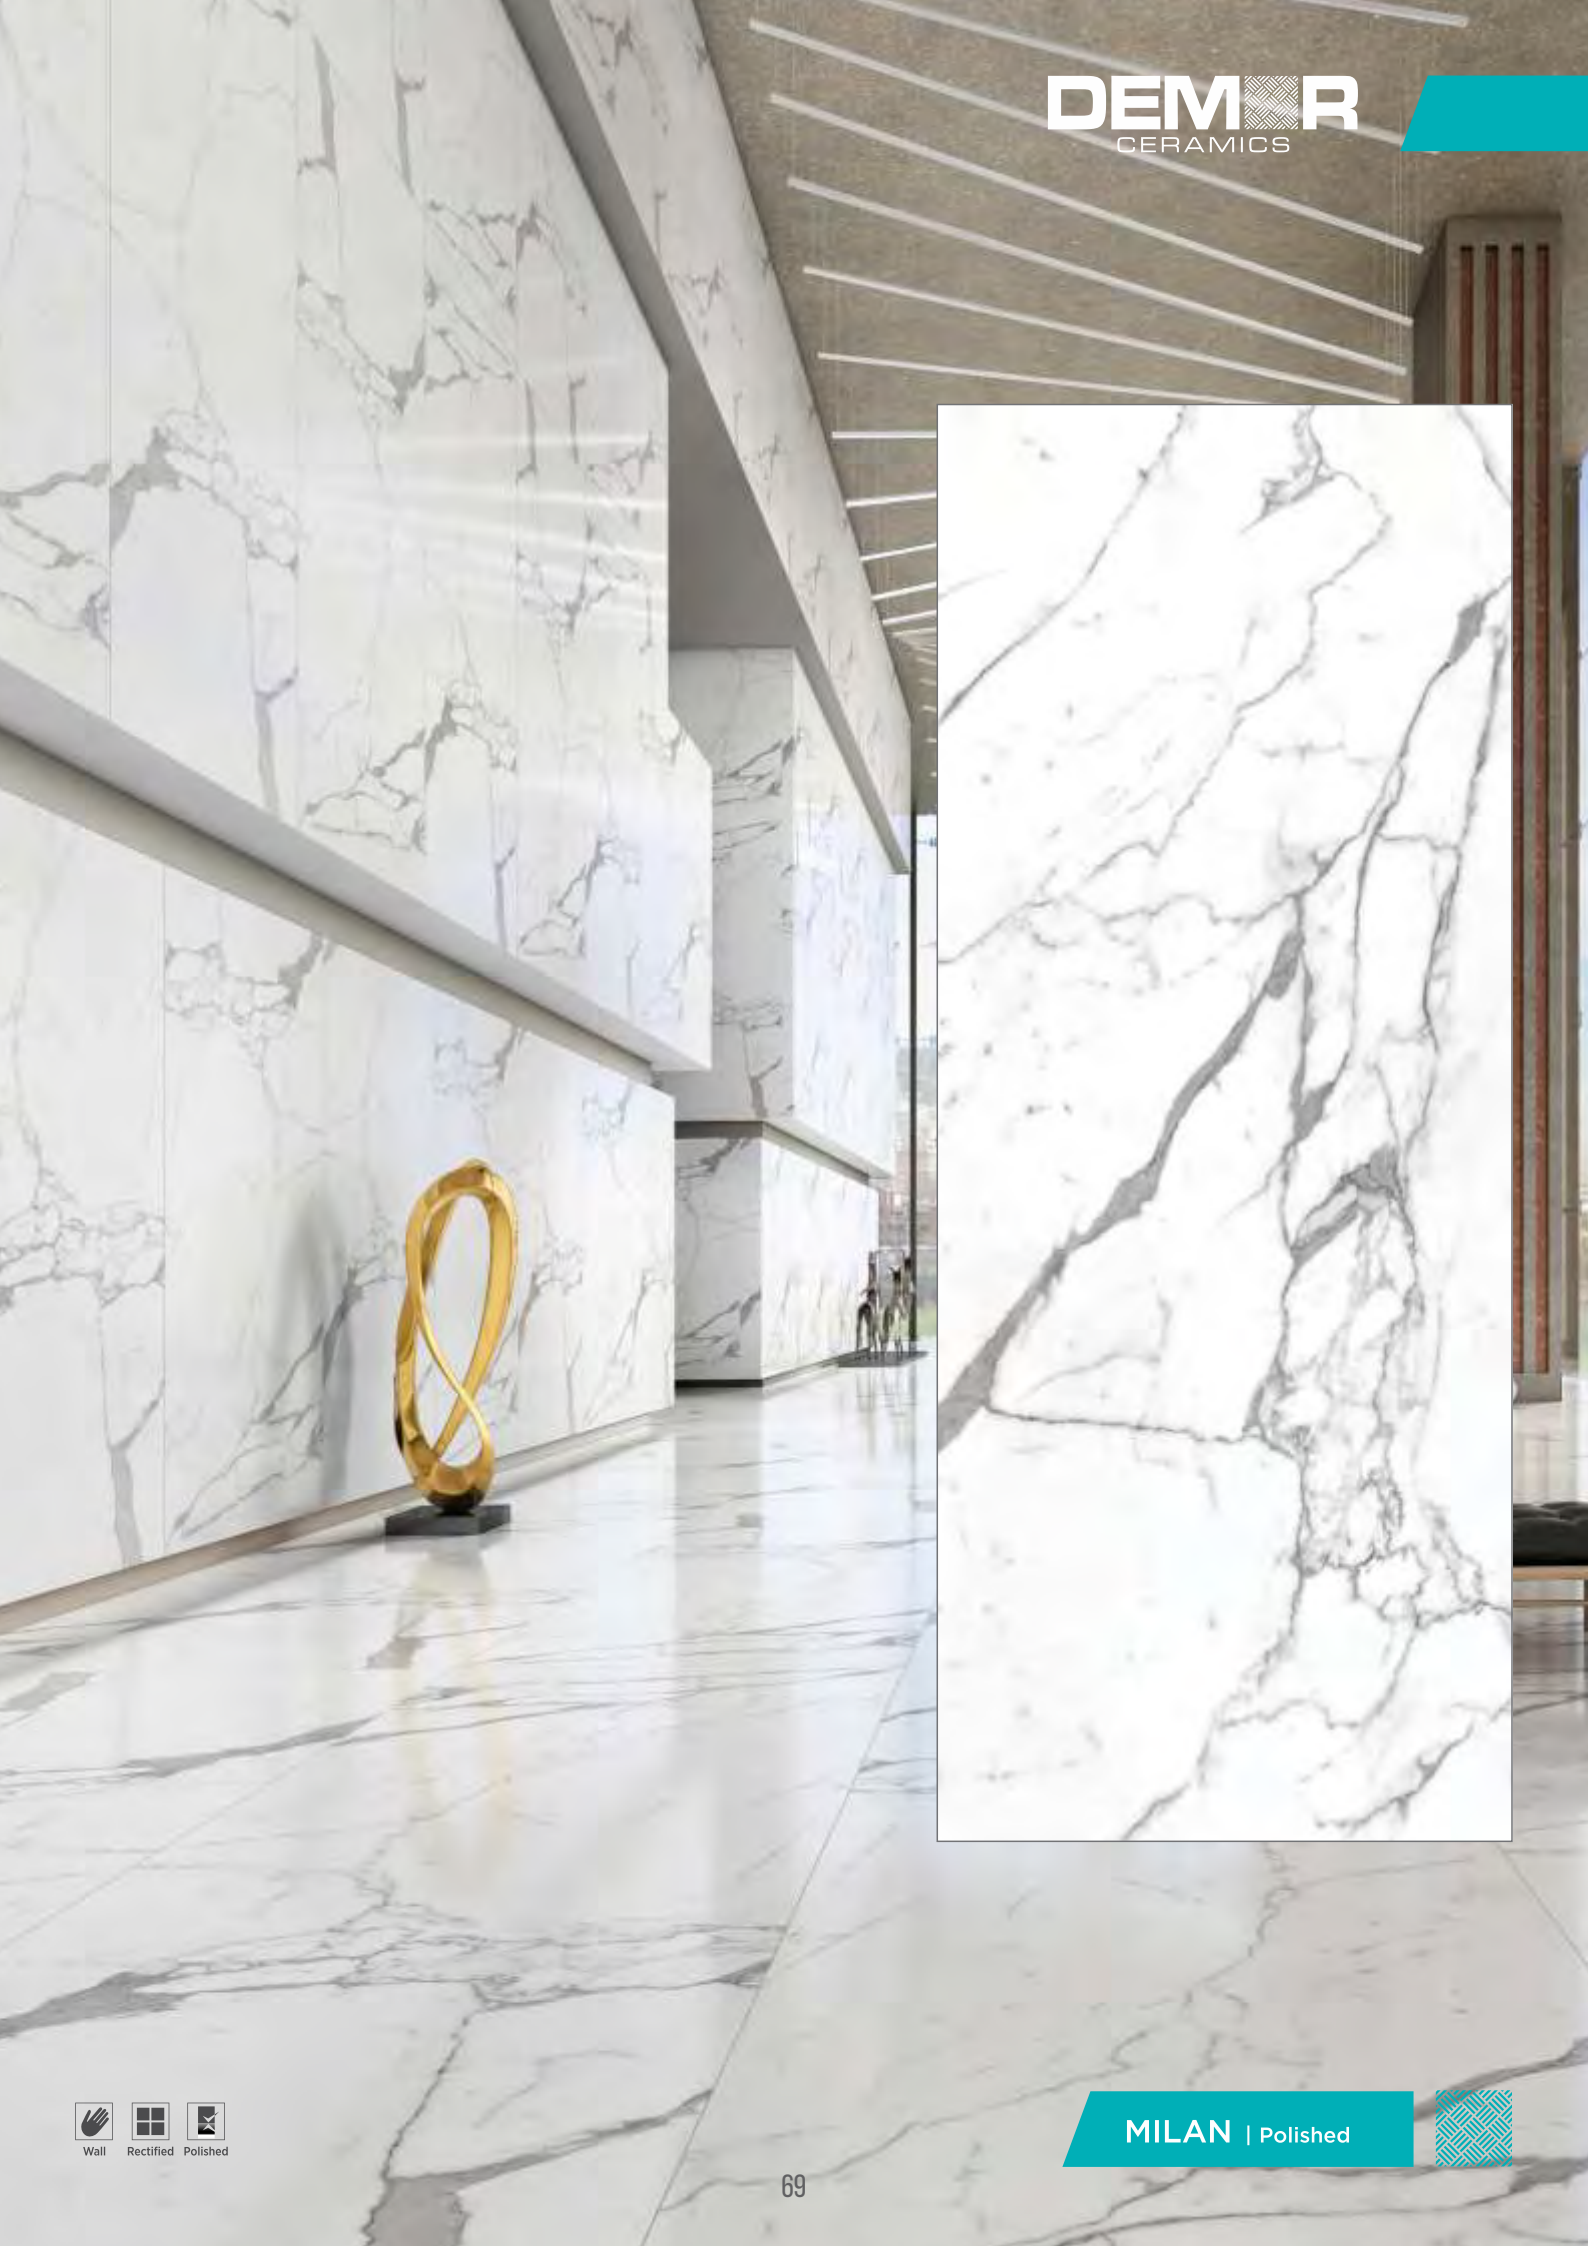

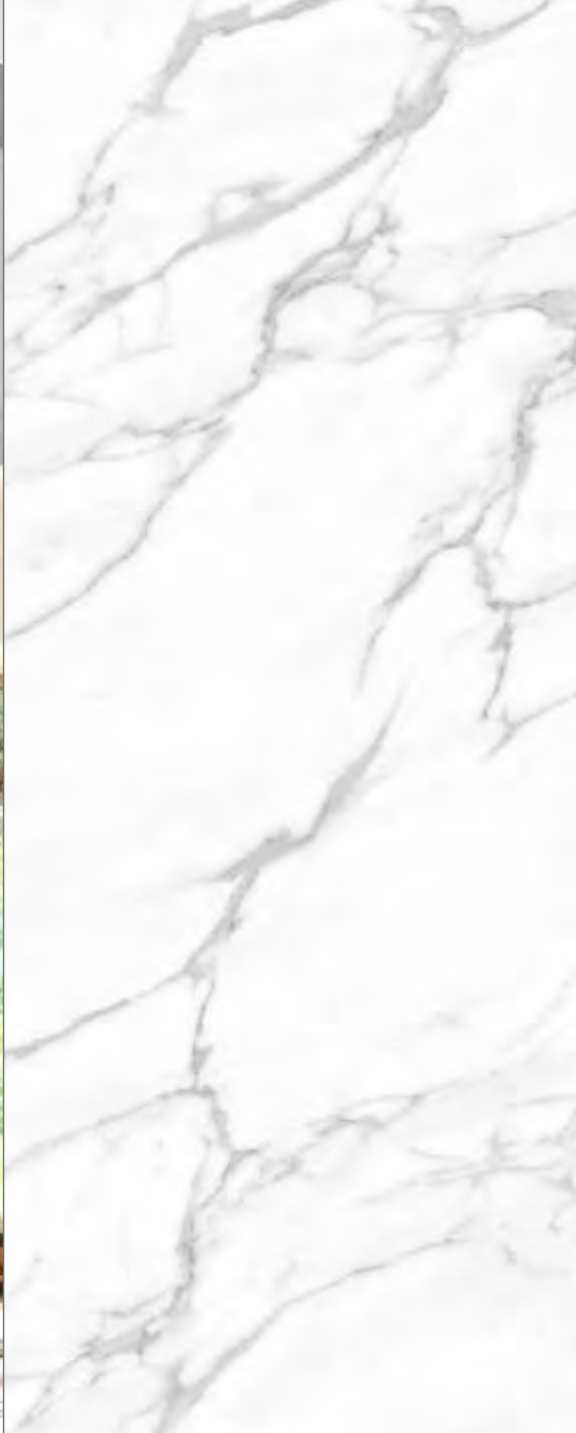



1. iMarble Slab Installation

There are 5 primary steps of tile laying

- 1) Surface Preparation
- 2) Dry Laying
- 3) Tile Laying
- 4) Grouting
- 5) Initial Cleaning

1.1. Surface Preparation

Plaster the surface of the floor/wall to be tiled smooth and complete the plastering and curing at least two weeks prior to tiling.

The surface on which the tiles are to be laid should be clean and free from dirt and particles to avoid contamination. Before laying floor tiles on old mosaic and cement floors, the floor should be clipped with a chisel or sharp tool so that the surface is sufficiently mail to grasp the mortar.

Qutone recommends use of adhesive of class C3E according to En12004 and SI according to EN12002 standards.

Deviations are more significant among different thicknesses of iMarble, given the way in which each thickness is produced.

Before cutting, inspect the slabs to ensure the tone of the different slabs is satisfactory. Make sure you do this inspection under lighting conditions that are similar to the area of installation. We recommend that you don't blend slabs from different batches.

1.2. Dry Laying

Tiling should preferably be started from the center area so that cut tiles, if any, come only on the sides. Arrange tiles in the desired layout to ensuring that there are equal cut tiles at either end. Proper gradient of floor should be provided for ease in drainage & ensuring avoidance of water accumulation.


Qutone recommends laying of tiles with adhesive. Proper care should be taken in terms of selection of adhesive with the area intended for usage. Various adhesive for varied application are available in the market. Proper market consultation with adhesive supplier is recommended. Follow the instruction of tile adhesive manufacturer for laying the tiles.



1.3. Tile Laying

Take care of the following things before fixing the tiles

- Entry and Exit points should have doormats in order to avoid abrasive dust particles from entering the floor area
- Avoid movement on damp surface
- Avoid pulling heavy, pointed or sharp objects on the flooring surface

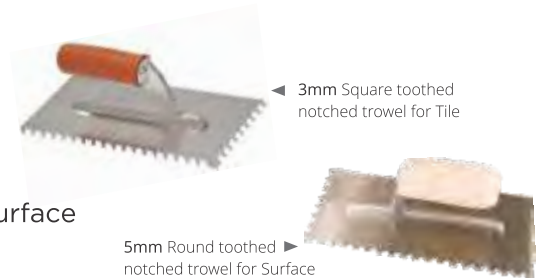

1.3.1. In-door Installation

Make sure to leave 2-3 mm space between the tiles. Create movement joints every 25 mtr or as directed by an expert. The adhesive must be applied to the back of the tile and the sub-layer with a notched trowel.

1.3.2. Outdoor Installation

Try to keep movement joints of approximately 1 cm wide at the corners. Create movement joints every 9-12 mtr or as directed by an expert. Always respect the building's structural joints while laying the tiles.

It is mandatory that the tiles be installed with a large joint between each of them. The width of the joint must be calculated based on the local climate conditions, the tile size and flexibility of the sub-layer.

1.3.3. Tile over Tile Installation

Ensure that the old tiles are fixed properly. If not, remove any unsecured tiles and fill the gaps with a suitable mortar. Before laying iMarble, wash the old tiling with water and soap to get rid of any dust, grease or other impurities and let it dry. Apply bonding resin before tiling over the old tiles. After this step, follow the instructions for indoor or outdoor installation. For fixing the Tiles on wall dado we recommend the use of adhesive please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on dado. Mark and lay the tiles from the center of the area to be tiled so that cut tiles, if any will be on the outer edge towards the wall. It is advisable to maintain a gap of 1 mm to 2mm between adjoining tiles to allow for possible expansion as per BIS/EN tolerance norms.

For fixing the Tiles on wall dado we recommend the use of adhesive. Please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on dado. Mark and lay the tiles from the center of the area to be tiled so that cut tiles, if any will be on the outer edge towards the wall. It is advisable to maintain a gap of 1 mm to 2mm between adjoining tiles to allow for possible expansion as per BIS/EN tolerance norms.

1.4. Grouting

Leave a Joint gap of about 3-4 mm between two tiles. The gaps between tiles should be filled with grout available in the market. Always follow the instructions of grout manufacturer. After filing the Joints, floor surface should be cleaned with sponge or a piece of cloth and filler should be allowed to set for 24 hours by avoiding all traffic there on. Before fixing tiles, lay them out in desired pattern and acceptable blend of color.

***Variation in size, colour and design are inherent property of tile.**

****DO NOT USE IRON HAMMER OR ANY HEAVY OBJECT TO PRESS THE TILES**

1.5. Initial Cleaning

The initial cleaning done immediately after the tiling process is complete is of essential importance for removing all mortar, adhesives and epoxy residues that may be left in the joints. We recommend use of an acid decalcifying product. Rub energetically to obtain the maximum cleaning. After washing the floor, which is just as important, rinse thoroughly with plenty of water to remove all traces of the detergent used. This process should be carried out as early as the grout is cured. Refer to the adhesive and grout manufacturers' instructions carefully.

2. General Recommendations:

For commercial and heavily used surface areas such as airports, hospitals, supermarkets, and any public spaces with heavy foot traffic which are thus subject to considerable soiling, it is necessary to use automatic cleaning machines with suction of the washing liquids.

This allows not only deep cleaning, but also the continuous removal of liquids containing substances that cause soiling, thus preventing the formation of films which are very difficult to remove.

Any detergent on the market can be used in the desired concentration for cleaning the high technology products, with the exception of HYDROFLUORIC acid (HF) or its compounds, according to UNI-EN 176 standards. In order to keep costs limited and speed up maintenance operations, the concentration of the detergent must always be as low as possible. For raised floors we suggest to choose bright or polished surfaces in large sizes: these materials can be dry cleaned or with the minimum use of liquids.

After the floor is laid it is necessary to make a very accurate initial cleaning with proper products.

3. Detergents:

The detergents are essential when laying new materials on old floors and for preparing the support surface perfectly as well as after installation to remove all traces of cement, adhesive or sealant from the newly laid materials.

4. Matt Materials:


For these materials, after completing the steps described in the section "Initial Cleaning", you only need to clean the floor with hot water containing small quantities of an alkaline detergent. On these types of surface it is not advisable to apply waterproofing product: the absence of porosity causes the waterproofing agent to deposit on the surface in an uneven way and to have unpleasant aesthetic effects.



Technical Specification

Characteristic	Standard as per ISO 13006 / EN 14411 Grp	Mega Thin Slab Value 6mm Thickness	Test Method
Dimensions & Surface Quality			
Deviation in length & Width	± 0.50%	± 0.20%	ISO - 10545-02
Deviation in Thickness	± 0.50%	± 0.50%	ISO - 10545-02
Straightness of Sides	± 0.50%	± 0.20%	ISO - 10545-02
Rectangularity	± 0.50%	± 0.20%	ISO - 10545-02
Surface Flatness	± 0.50%	± 0.20%	ISO - 10545-02
Color Difference	Unaltered	No Change	ISO - 10545-16
Glossiness	As per Mfg.	>90%	Glossmeter
Physical Properties			
Water Absorbtion	≤0.05%	≤0.05%	ISO - 10545-03
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
Modulus of Rapture	Min. 35 N/mm ²	Min 40 N/mm ²	ISO - 10545-04
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO - 10545-04
Impact Resistance	As per Mfg.	Min. 0.55	ISO - 10545-05
Surface Abration Resistance	As per Mfg.	Min. Class 3	ISO - 10545-07
Moh's Hardness	As per Mfg.	Min. Class 4	EN 101
Frost Resistance	No Damage	No Damage	ISO - 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO - 10545-09
Moisture Expansion	Nil	Nil	ISO - 10545-10
Linear Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.50 x 10 ⁻⁶	ISO - 10545-08
Crazing Resistance	As per Mfg.	Min. 10 Cycle	ISO - 10545-11
Slip Resistance	As per Mfg.	>0.40	ISO - 10545-17
Fire Resistance	As per Mfg.	Fire Proof	N.A.
Chemical Properties			
Resistance to low concentrations of Acids & Alkalis	No Damage	No Damage	ISO - 10545-13
Resistance to high concentrations of Acids & Alkalis	No Damage	No Damage	ISO - 10545-13
Resistance to household chemicals & swimming pool Salts	No Damage	No Damage	ISO - 10545-13
Lead & Cadmium Release	No Damage		ISO - 10545-15
Stain Resistance	Resistant	Resistant	ISO - 10545-14
PACKING DETAILS			
Dimension (mm)	SQ. MTR.	SQ. FT.	
1200x3000 mm	3.6	38.75	

Recommended Application Areas

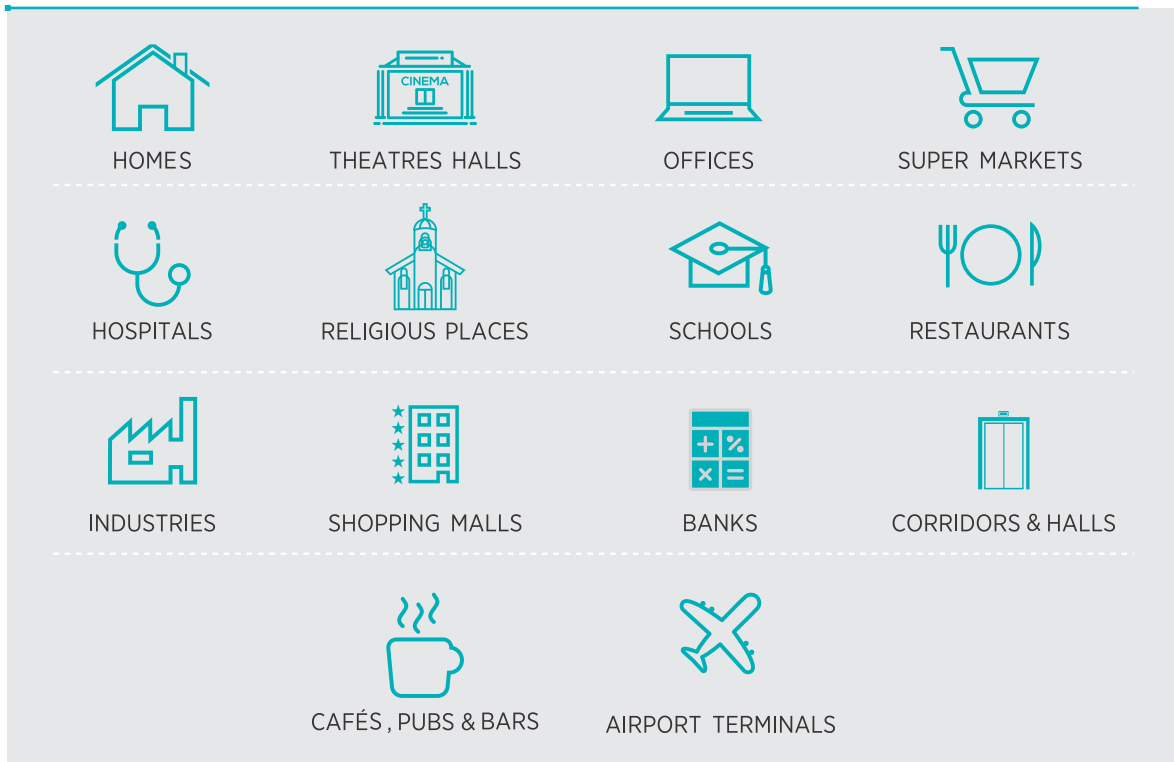

Technical Features



Note : Colors shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without any notice. Variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



THE EDGE

BY SWEID & SWEID

Porcelain Wall Tiles with
with stainless steel, brushed nickel, copper, bronze,
and other finishes. Price
Factory Direct & Wholesale
order & delivery, service with original and
factory direct hardware



Lora Breccia

Size

1200x1800mm

Finish

Polished

Thickness

9 mm

Forma Marfil

Size


1200x1800mm

Finish

Polished

Thickness

9 mm

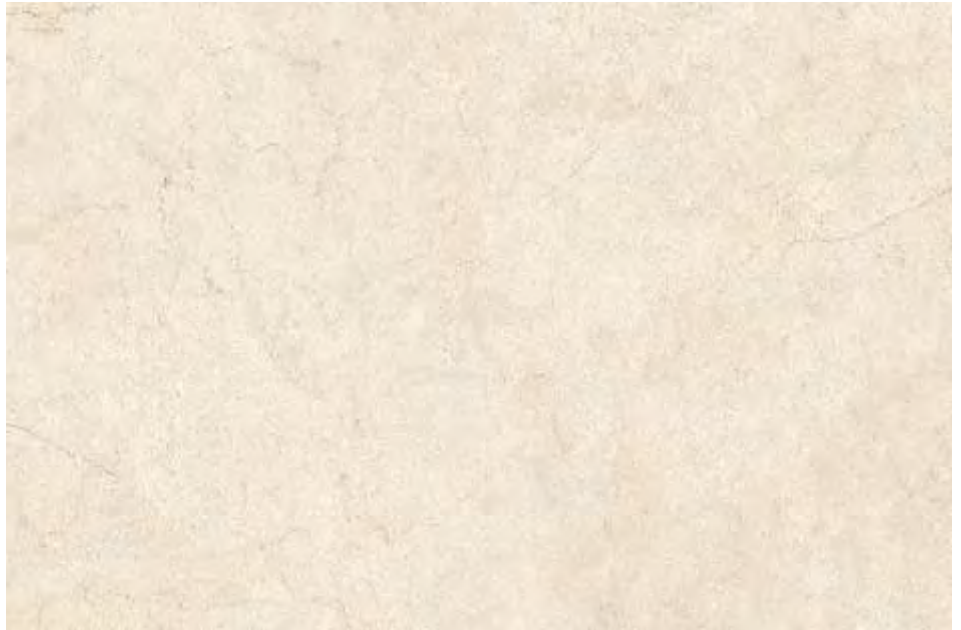

Solo

Size

1200x1800mm

Finish

Polished

Thickness

9 mm



Melody Bianco

Size
1200x1800mm

Finish
Polished

Thickness
9 mm

Melody Bronze

Size
1200x1800mm

Finish
Polished

Thickness
9 mm



Amba Marfil

Size
1200x1800mm

Finish
Polished

Thickness
9 mm





Cartina Grey

Size
1200x1800mm

Finish
Polished

Thickness
9 mm

Loft Steel

Size
1200x1800mm

Finish
Polished

Thickness
9 mm



Lora White

Size
1200x1800mm

Finish
Polished

Thickness
9 mm

1200x1800mm



Milos Sky

Size

1200x1800mm

Finish

Polished

Thickness

9 mm





Belgian Beige Silk

Size
1200x1800mm

Finish
Satin


Thickness
9 mm

Melody Bianco Silk

Size
1200x1800mm

Finish
Satin

Thickness
9 mm

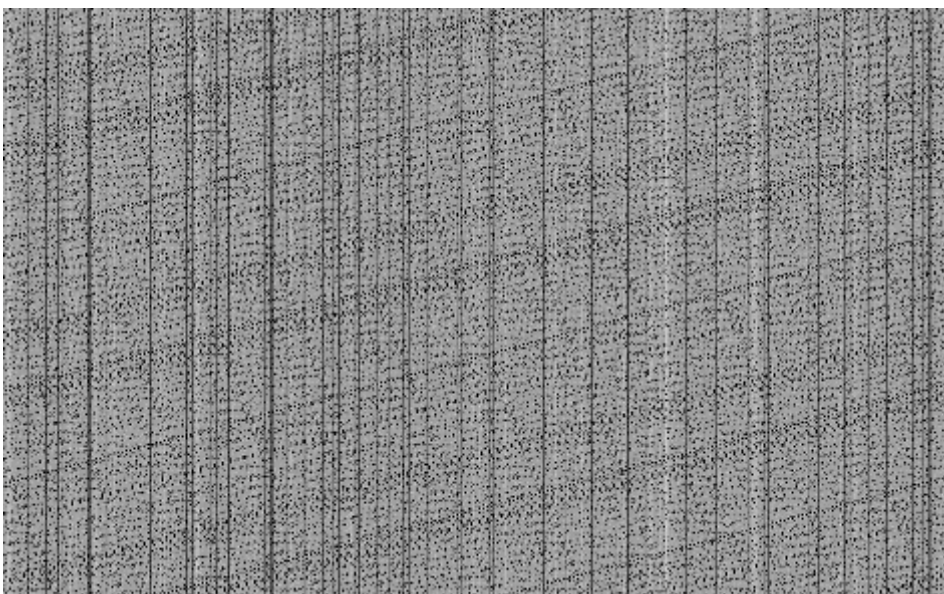

Joliet Platinum

Size
1200x1800mm

Thickness
9 mm



Rasina

Size


1200x1800mm

Finish

Polished

Thickness

9 mm

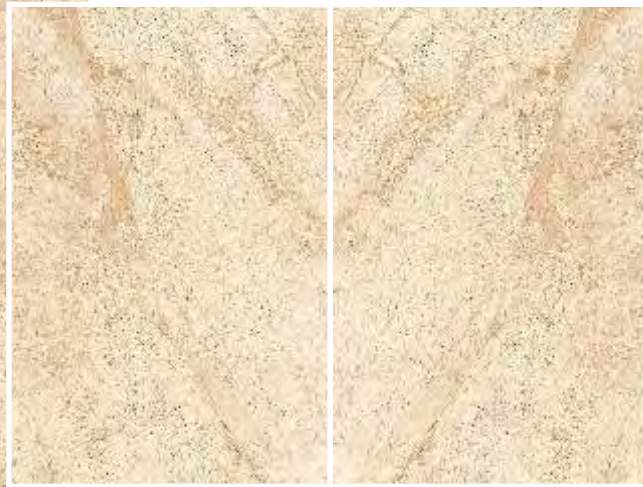

Book Match

Blaze Bianco

Size


1200x1800mm

Finish

Polished

Thickness

9 mm

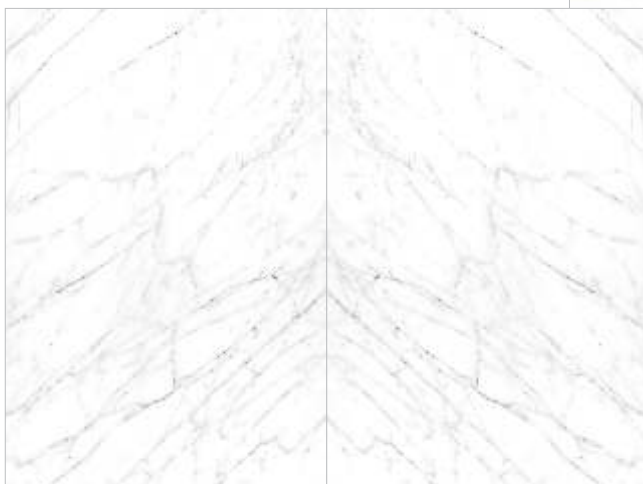

Book Match

Rasina Silk

Size


1200x1800mm

Finish

Satin

Thickness

9 mm

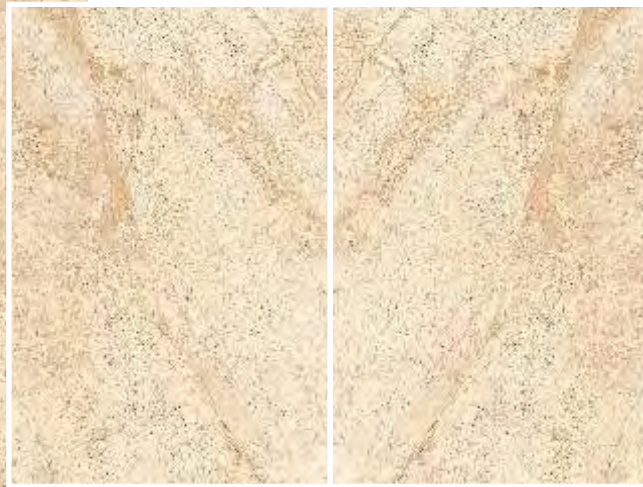

Book Match

Blaze Bianco Silk

Size


1200x1800mm

Finish

Satin

Thickness

9 mm

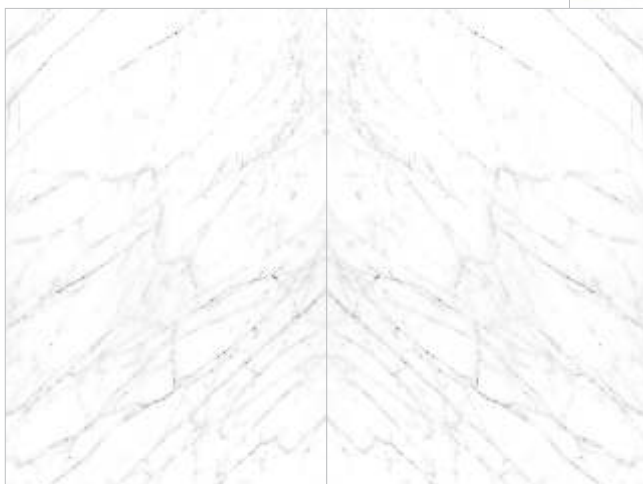

Book Match



DISCOVER THE DEMOR DIFFERENCE

- RANGE
- QUALITY
- VARIETY
- ECONOMY

Call 1800 0 DEMOR to place your order

DEMOR
HOME WORLD

www.demorceramics.com.au

DEMOR
HOME WORLD

1800 ODEMOR
1800 033667

info@demorceramics.com.au • www.demorceramics.com.au